



1. Mechanical Dimensions:

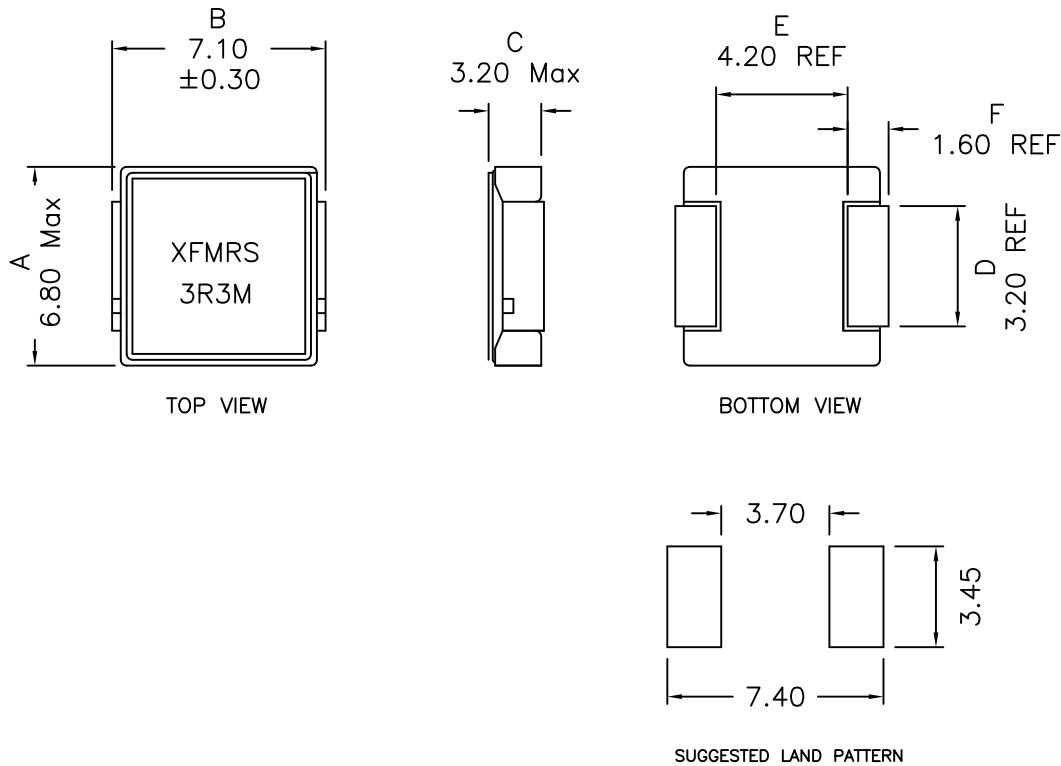

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 3.30uH±20% @100KHz 0.25V, 0.0Adc

Q: 20 Min @100KHz 0.25V

DCR: 30 mOhms Max

Irms: 6.0Adc (Based on 40°C Temp Rise)

Isat: 13.5Adc (Based on 20% drop in OCL)


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Recommended IR Reflow peak temp of 250C Max.
12. Outsourced item processed & controlled under XFMRS QA system

DOC REV: A/9

XFMRS Inc www.XFMRS.com	Title: MAGNETICALLY SHIELDED HIGH CURRENT INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFHCL6-3R3M	REV. A
SHEET 1 OF 5	DWN.	Yuan	Oct-25-13
	CHK.	YK Liao	Oct-25-13
	APP.	BSJ	Oct-25-13

Core Loss
(mW/cm³)

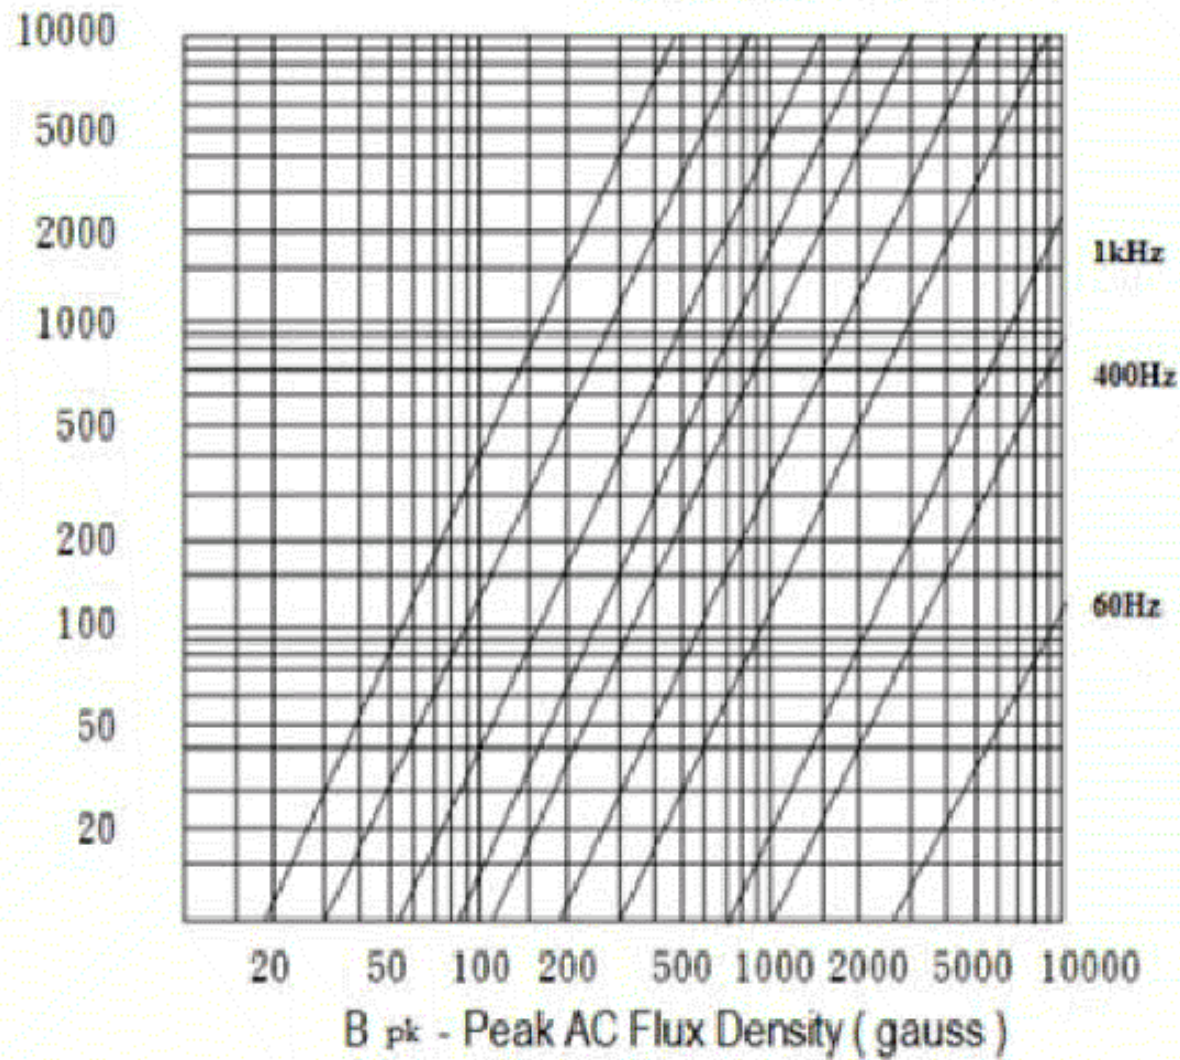

XFMRs Inc
www.XFMRs.com

Title: **MAGNETICALLY SHIELDED
HIGH CURRENT INDUCTOR**

UNLESS OTHERWISE SPECIFIED
TOLERANCES:
.xx ±0.25
Dimensions in MM


P/N: XFHCL6-3R3M		REV. A
DWN.	Yuan	Oct-25-13
CHK.	YK Liao	Oct-25-13
APP.	BSJ	Oct-25-13

DOC REV: A/9

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

SHEET 2 OF 5

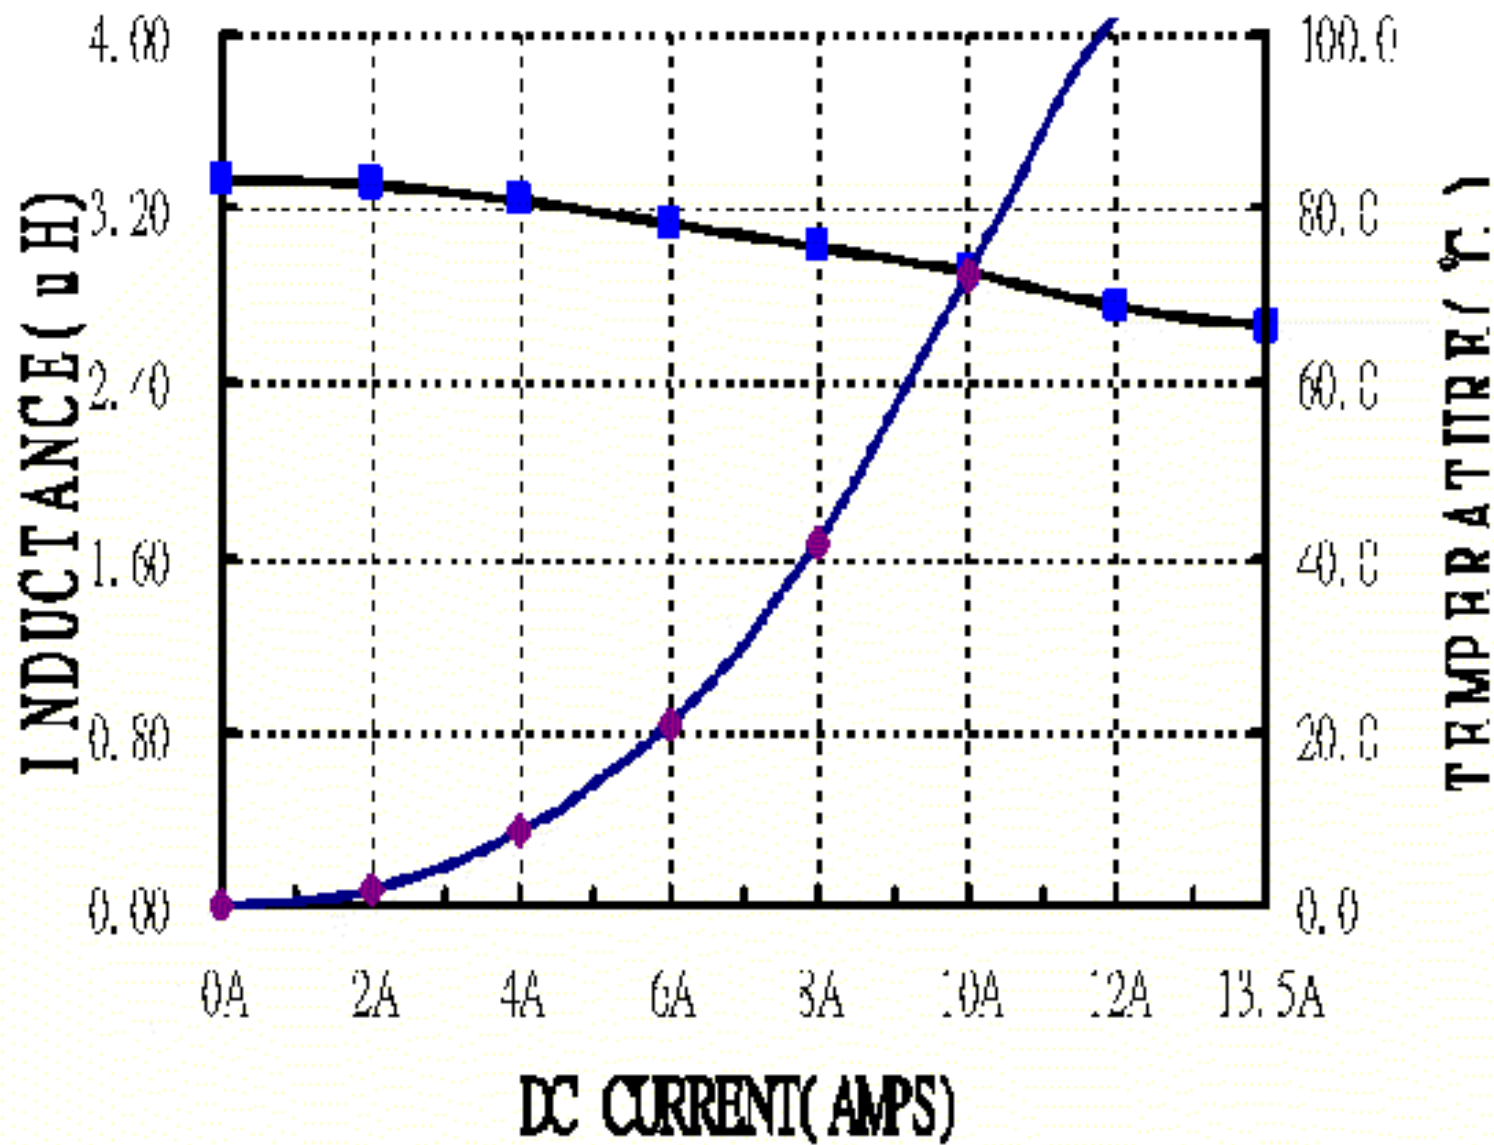


DOC REV: A/9

XFMRs Inc www.XFMRs.com	Title: MAGNETICALLY SHIELDED HIGH CURRENT INDUCTOR		
	P/N: XFHCL6-3R3M		REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	DWN.	Yuan	Oct-25-13
	CHK.	YK Liao	Oct-25-13
	APP.	BSJ	Oct-25-13
SHEET 3 OF 5			

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

Ls Vs Frequency graph:

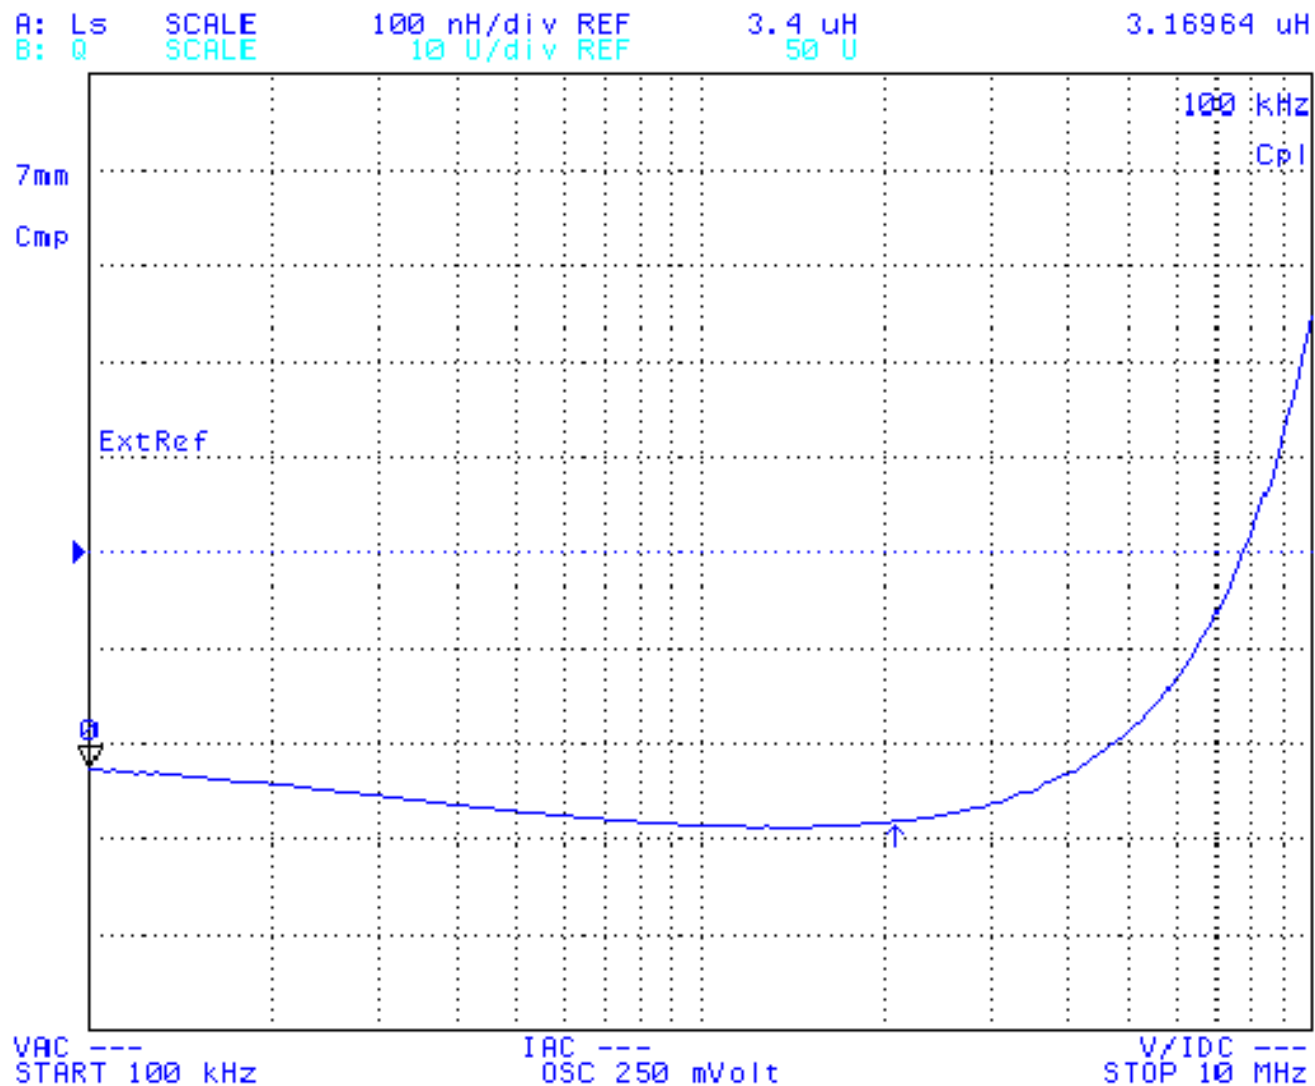

XFMRs Inc
www.XFMRs.com

Title: **MAGNETICALLY SHIELDED
HIGH CURRENT INDUCTOR**

UNLESS OTHERWISE SPECIFIED
TOLERANCES:
.xx ±0.25
Dimensions in MM

P/N: XFHCL6-3R3M	REV. A
DWN. Yuan	Oct-25-13
CHK. YK Liao	Oct-25-13
APP. BSJ	Oct-25-13


DOC REV: A/9

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

SHEET 4 OF 5

Q value Vs Frequency graph:

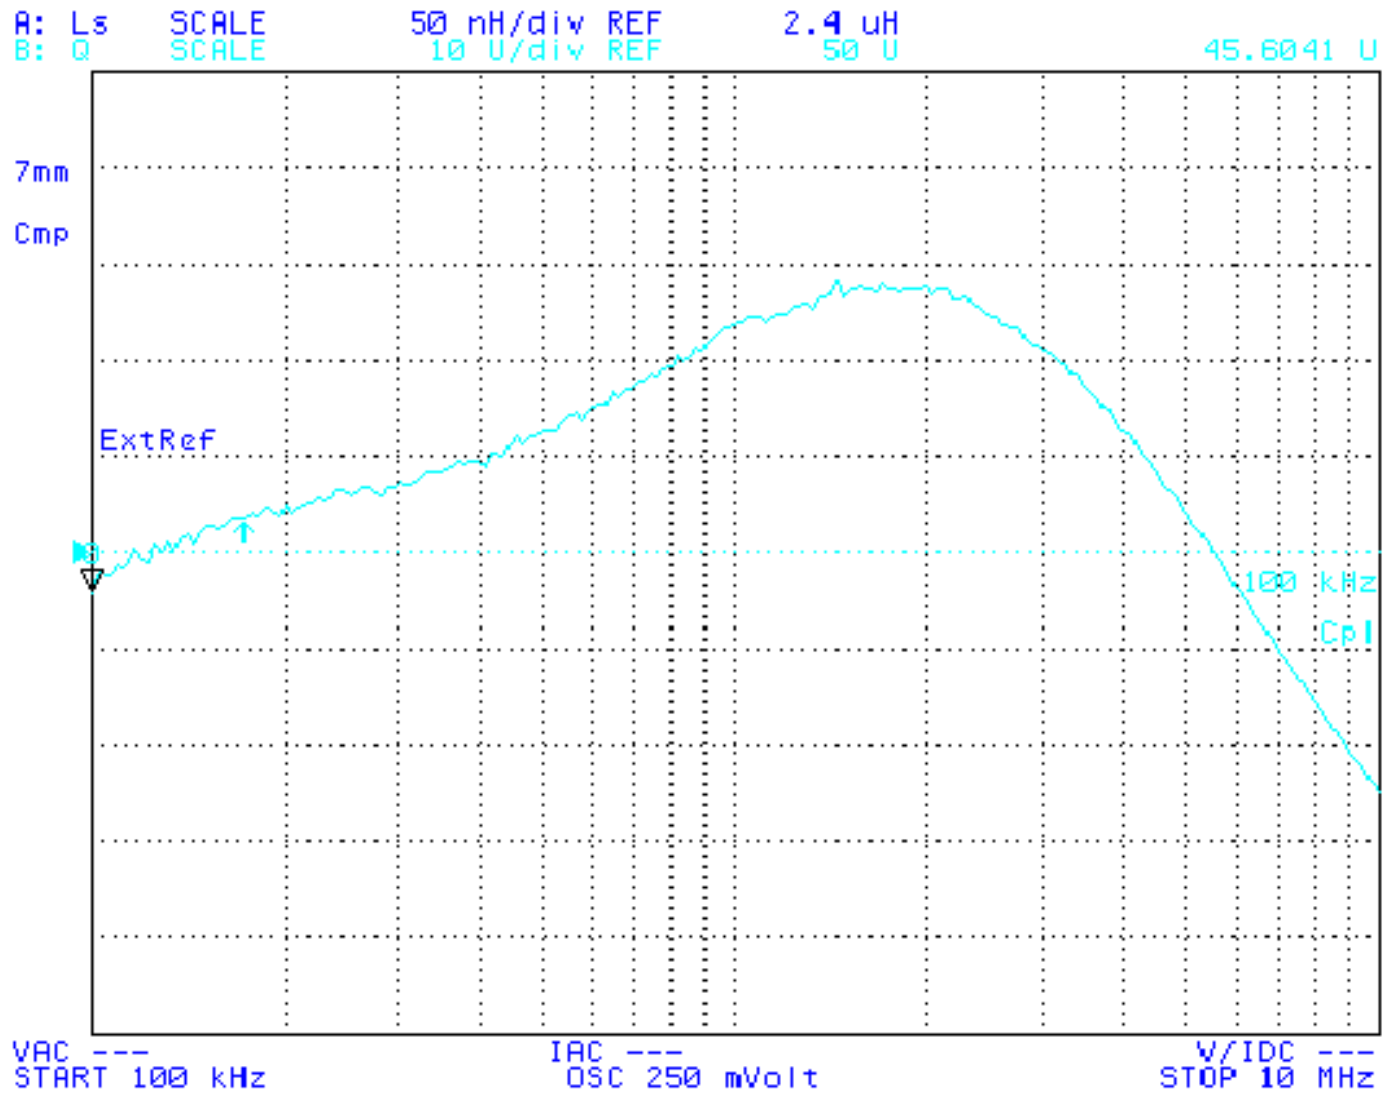

DOC REV: A/9

XFMRs Inc www.XFMRs.com		Title: MAGNETICALLY SHIELDED HIGH CURRENT INDUCTOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XFHCL6-3R3M	REV. A
	DWN.	Yuan	Oct-25-13
	CHK.	YK Liao	Oct-25-13
SHEET 5 OF 5	APP.	BSJ	Oct-25-13

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.