1. Mechanical Dimensions:

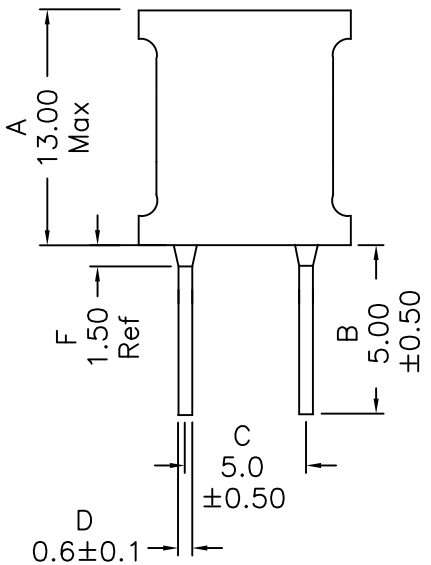

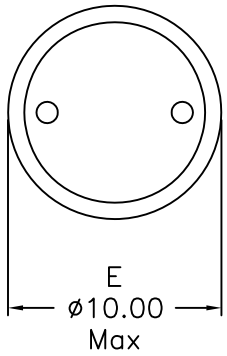

2. Schematic:



3. Electrical Specifications:

OCL: 47uH±10% @1KHz 0.1V

Q: tbdMin @1KHz 0.1V

Isat: 1.40Adc (Based on 30% drop in OCL)

DCR: 0.10 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRS Inc. www.XFMRS.com	Title: Radial Leaded Inductor		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.10 Dimensions in MM	P/N: RLXF1013-470K		REV. A
	DWN.	Xianyi	Jan-31-13
	CHK.	YK Liao	Jan-31-13
SHEET 1 OF 1	APP.	BSJ	Jan-31-13

Doc Rev: A/-

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.