1. Mechanical Dimensions:

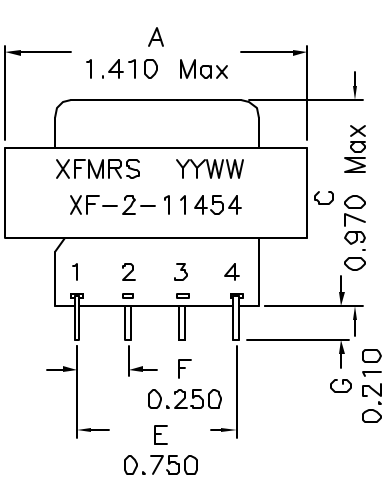

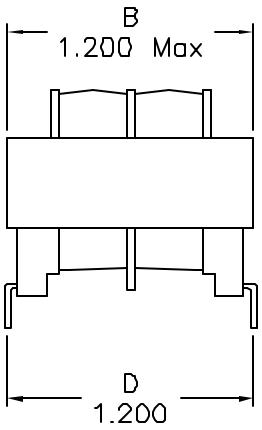

Pins 2&3 are removed.



BOTTOM VIEW

2. Schematic:

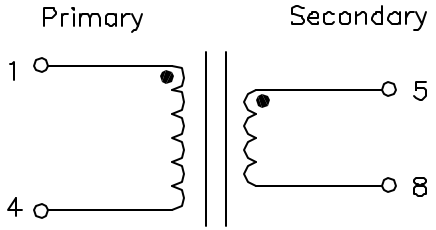

3. Electrical Specifications:

Primary: Pins 1–4 277V 50/60Hz

Ex I: Pins 1–4 5mA 277V 60Hz

Secondary: Pins 5–8 8.0V @ 0.140Aac

DC Res.: Pins 1–4 4250±15%

DC Res.: Pins 5–8 5.95±15%

HIPOT: 2500Vac Pri–Sec, Wdgs–Core

Notes:

1. Solderability: Leads shall meet MIL–STD–202, Method 208D for solderability.
2. Flammability: UL94V–0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151558
5. Operating Temperature Range: –20°C to +85°C

XFMRS Inc	Title: Power Xfmr		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010 Dimensions in INCH	P/N: XF–2–11454		REV. A
	DWN.	罗振江	Jan–21–04
	CHK.	袁玉坤	Jan–21–04
Scale 1.5:1 SHT 1 OF 1	APP.	Joe Huff	Jan–21–04

DOC. REV A/1

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.