
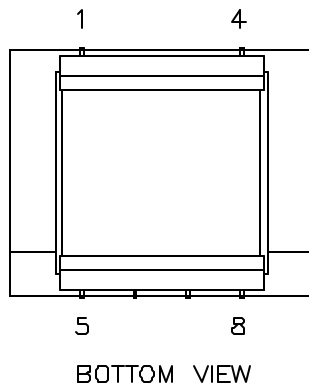
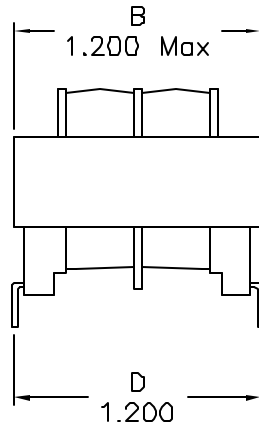



1. Mechanical Dimensions:

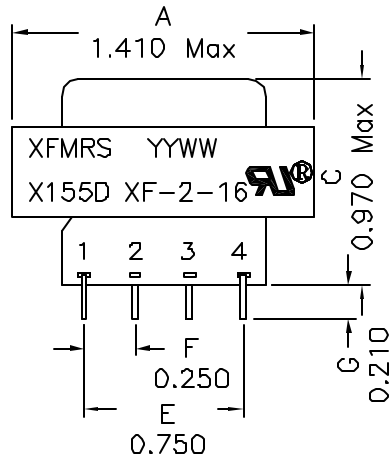

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. UL506 Recognized, file #E238841

2. Schematic:

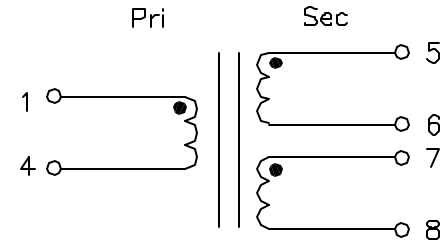

3. Electrical Specifications:

Primary: Pins 1-4 115V 50/60Hz

Ex I: Pins 1-4 30mA Max 120V 60Hz or 100V 50Hz

Parallel Sec: 8.0V @ 0.140Aac

Series Sec: 16.0V @ 0.070Aac

DC Res.: Pins 1-4 890±15% Ohms

DC Res.: Pins 5-6 13.0±15% Ohms

DC Res.: Pins 7-8 13.0±15% Ohms

HIPOT: 2500Vac Pri-Sec, Wdgs-Core

DOC. REV A/5

XFMRS Inc www.XFMRS.com		Title: Power Xfmr	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010 Dimensions in INCH		P/N: XF-2-16	REV. A
		DWN. 罗振江	Aug-17-05
Scale 1.5:1 SHT 1 OF 1		CHK. 廖玉坤	Aug-17-05
		APP. Joe Huff	Aug-17-05