

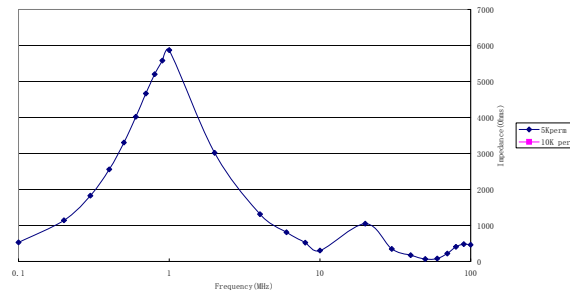
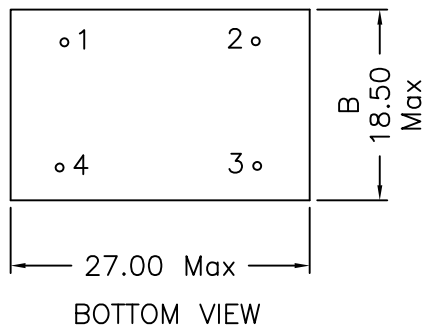


1. Mechanical Dimensions:

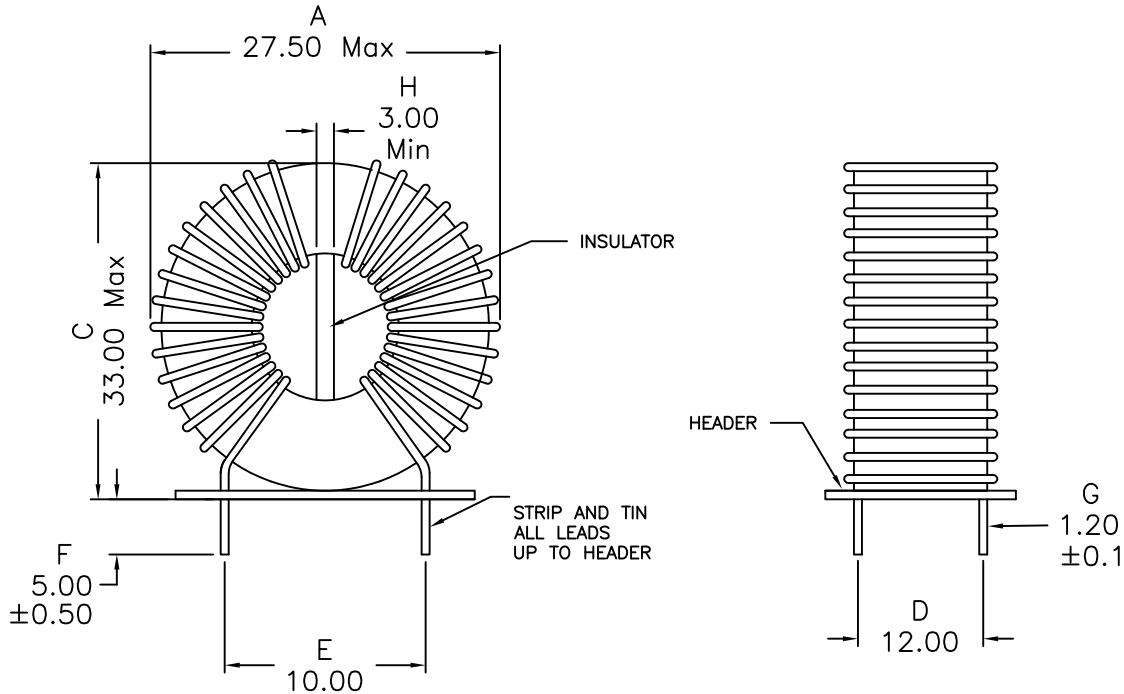

2. Schematic:

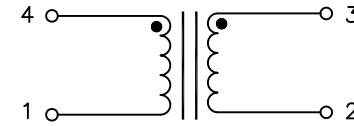

3. Electrical Specifications:

OCL: 1.0mH±30% @10KHz 0.1V, Each Wdg
 0.4mH Min @10KHz 0.1V, -40°C

Q: Pins 4-1 20 Min @10KHz, 0.1V

Rated Voltage: 250VAC

DCR: 11mOhms Max, Each Wdg

Current Rating: 10Aac

Hipot: 2000Vac, Wdg to Wdg

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature: -40°C to +125°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

| | | | | |
|-----------------------------------|---|--------------------|-----------|--|
| XFMRs Inc www.XFMRs.com | Title: COMMON MODE CHOKE | | | |
| | UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 | P/N: XF0013-VMCMC2 | REV. A | |
| Dimensions in MM | DWN. | Xiany | Oct-12-17 | |
| | CHK. | YK Liao | Oct-12-17 | |
| SHEET 1 OF 1 | APP. | GL | Oct-12-17 | |

DOC REV: A/4