



1. Dimensions:

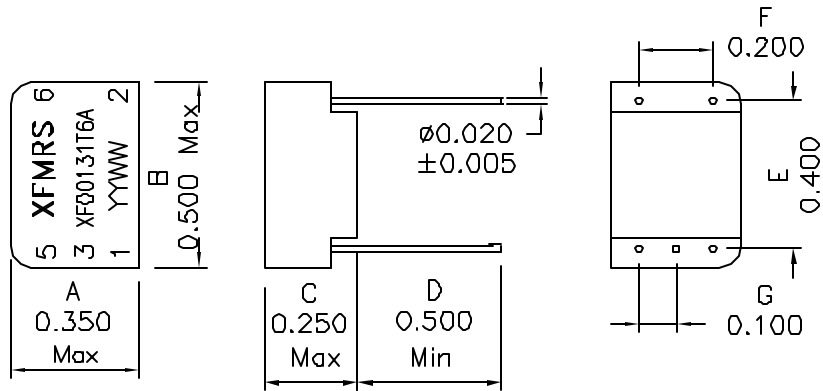

2. Schematic:

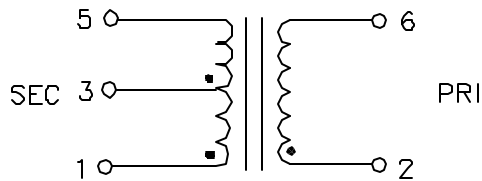

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms
 Turns Ratio: 1:1.15CT ±5%
 PRI OCL: 1.20mH Minimum @100KHz 50mV
 PRI LL: 0.60uH Maximum @100KHz 50mV
 Cw/w: 35pF Maximum @100KHz 50mV
 PRI DCR: 0.70 Ohms Maximum
 SEC DCR: 0.90 Ohms Maximum

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV. A/3

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: T1/CEPT/DS1 MAGNETICS TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010	P/N: XFO0131T6A		REV. A
	DWN.	康玉坤	Jul-26-07
Dimensions in Inch	CHK.	李清儿	Jul-26-07
SCALE 2:1 SHT 1 OF 1	APP.	BW	Jul-26-07