1. Dimensions:

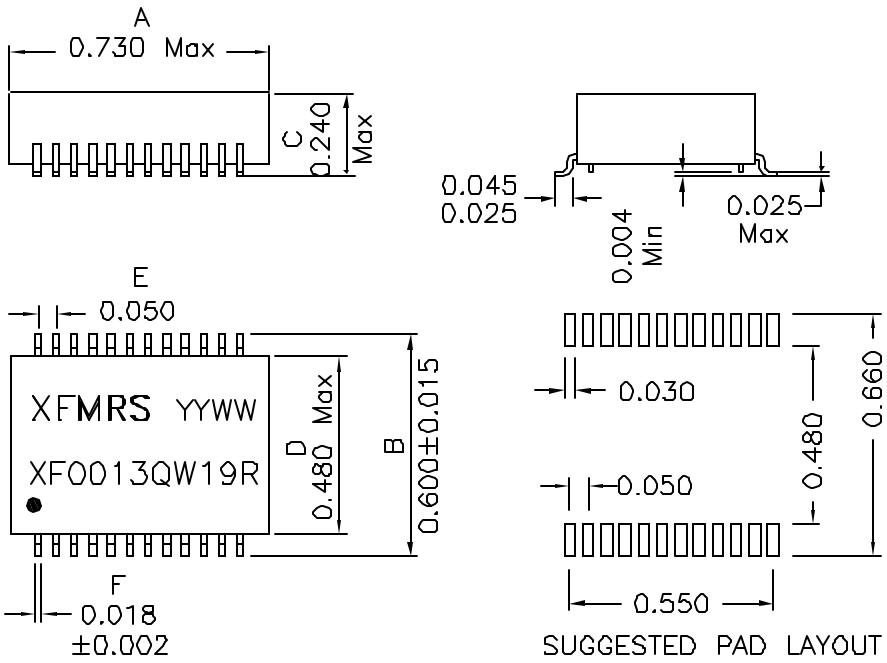

2. Schematic:

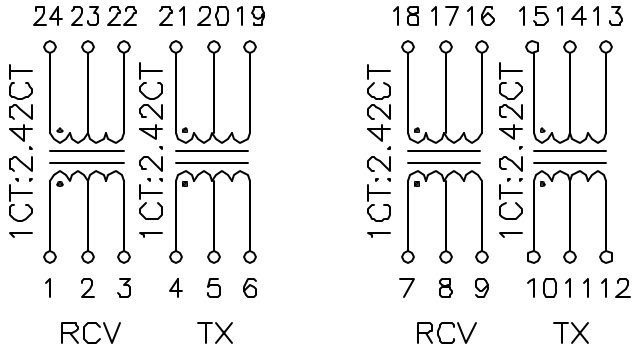

3. Electrical Specifications: @25°C

Isolation: 3000 Vrms (PRI to SEC)

TX Turns Ratio: 1CT:2.42CT (PRI:SEC)

RCV Turns Ratio: 1CT:2.42CT (PRI:SEC)

PRI OCL: 1.50mH Typical @100KHz 50mV

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

PRI LL: 0.5uH Maximum @100KHz 50mV (SEC Shorted)

Pri DCR: 0.80 Ohms Max

Crosstalk: −60dB Min (0.1 to 5MHz)

Notes:

1. Solderability: Leads shall meet MIL−STD−202G, Method 208H for solderability.
2. Flammability: UL94V−0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from −40°C to +85°C
6. Storage Temperature Range: −55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV: A/2

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com	Title: T1/E1/CEPT DUAL PORT		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0013QW19R		REV. A
	DWN.	Juan Mao	Apr−11−08
	CHK.	YK Liao	Apr−11−08
SHEET 1 OF 1	APP.	Joe Huff	Apr−11−08