



1. Dimensions:

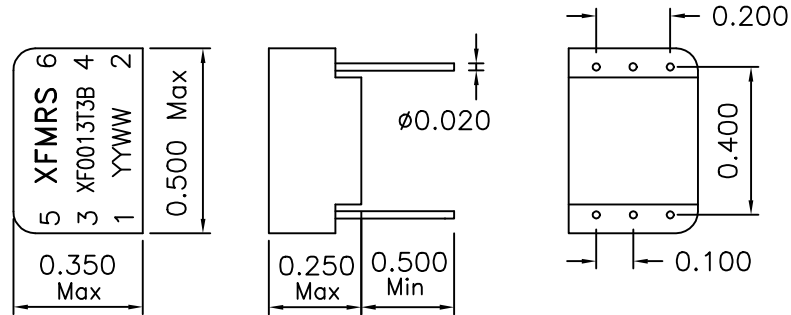

2. Schematic:



3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms

Turns Ratio: (P2-6:P3-5)=1:1, (P2-6:P1-5)=1:1.26 ±5%

PRI OCL: 1.50mH Min @100KHz 50mV

PRI LL: 0.80uH Max @100KHz, 50mV SEC shorted

Cw/w: 50pF Max @100KHz 50mV (PRE/SEC)

PRI DCR: 0.90 Ohms Max

SEC DCR: 1.10 Ohms Max

DOC. REV. A/1

XFMRs Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 2:1 SHT 1 OF 1	Title: T1/CEPT/ISDN-PRI TRANSFORMERS	
	P/N: XF0013T3B	REV. A
	DWN. 廖玉坤	May-06-00
	CHK. 李清儿	May-06-00
	APP. Phil C	May-06-00