1. Dimensions:

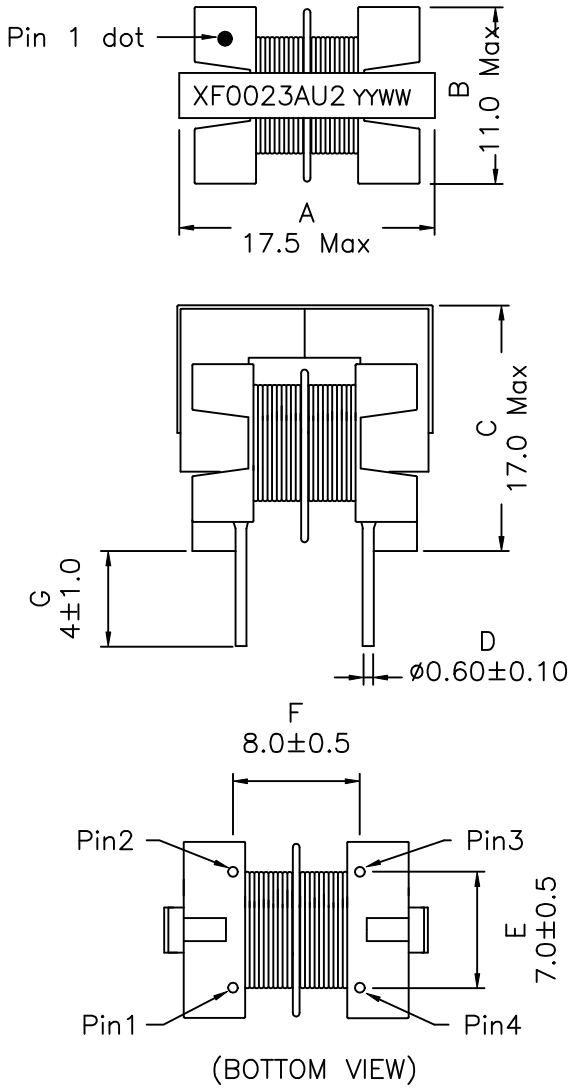

2. Schematic:

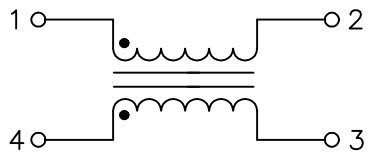

3. Electrical Specifications:

TURN RATIO: (PIN1−2) : (PIN4−3) = 1:1±1%

INDUCTANCE: 2.0mH Min. @10KHz 0.1V

PIN1−2, PIN4−3 DC Resistance: 1.0 ohms Max.

Rated Current: 0.500Arms

Rated Voltage: 250Vac

HIPOT: 2000VAC (PIN1−2 TO PIN4−3)

HIPOT: 2000VAC (Windings to Core)

Notes:

1. Solderability: Leads shall meet MIL−STD−202, Method 208D for solderability.
2. Flammability: UL94V−0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: −40°C to +85°C

DOC, REV: A/1

XFMRS Inc	Title: COMMON MODE CHOKE		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM	P/N: XF0023A−00U2		REV. A
	DWN.	李小锋	Oct−29−03
	CHK.	廖玉坤	Oct−29−03
SHEET 1 OF 1	APP.	BW	Oct−29−03

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION