

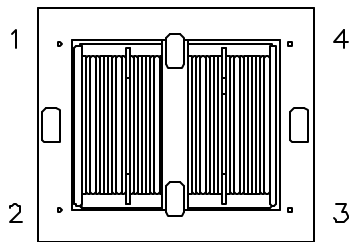


1. Mechanical Dimensions:

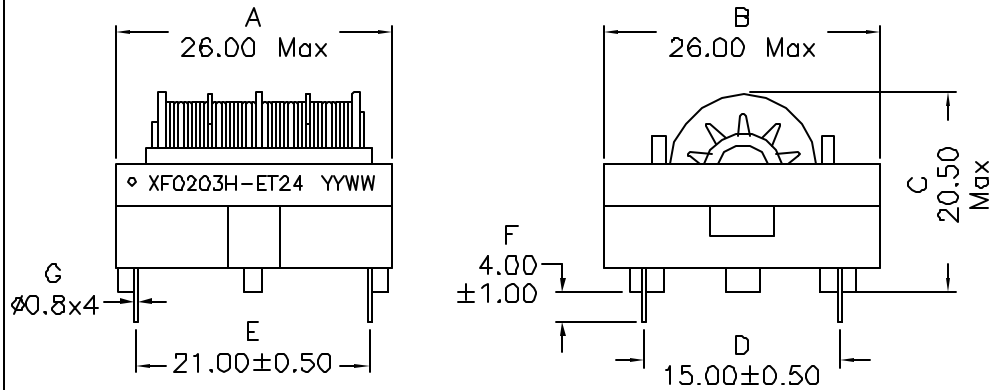

(BOTTOM VIEW)

2. Schematic:

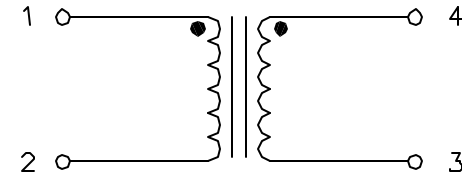

3. Electrical Specifications:

OCL: 20mH Min @10KHz 0.1V, Each Wdg

BmH Min @10KHz, 0.1V -40°C to 0°C each wdg

(1-2) - (4-3) = 350uH Max @10KHz, 0.1V

Q: 20 Min @10KHz 0.1V

LL: Pins 1-2 400uH Max @100KHz 0.1V Short 4+3

DCR: 0.640 Ohms Max, Each Wdg

Rated Current: 1000mAac

Hipot: 3000Vac, Wdg to Wdg, Wdgs to Core

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: LINE FILTER	
UNLESS OTHERWISE SPECIFIED		P/N: XF0203H-ET24	REV. A
TOLERANCES: .xx ±0.30		DWN.	Xianyí
Dimensions in mm		CHK.	YK Liao
SHEET 1 OF 1		APP.	Joe Huff
			Mar-03-09
			Mar-03-09
			Mar-03-09