

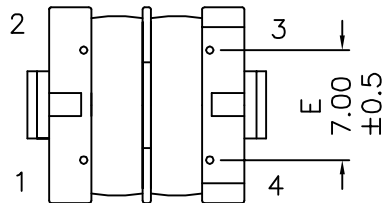
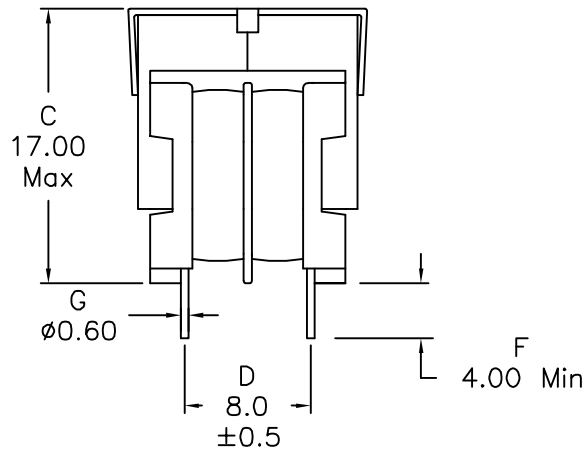


1. Mechanical Dimensions:

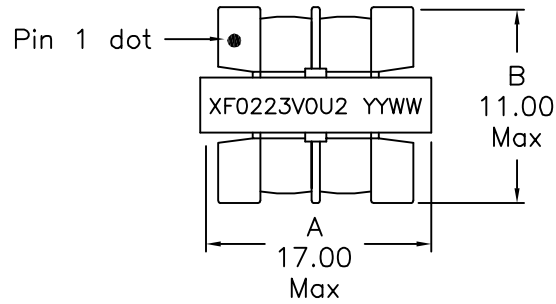

(BOTTOM VIEW)

2. Schematic:

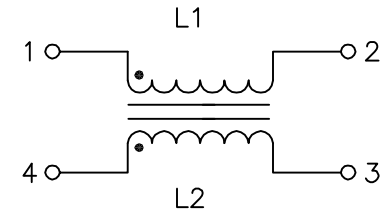

3. Electrical Specifications:

Inductance: 22.0mH Min @1KHz 1.0V, Each Wdg
 Q: 10 Min @10KHz 0.1V, Each Wdg
 Insulation Resistance: 100 MOhms Min
 DCR: 4.00 Ohms Max, Each Wdg
 Rated Current: 270mA rms
 Rated Voltage: 480Vac
 Hipot: 3750Vrms Wdg to Wdg, 2mA Leakage I Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs [®] www.XFMRs.com	Title: AC LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF0223V-00U2
SHEET 1 OF 1	DWN.	Mei Chen	Apr-22-19
	CHK.	YK Liao	Apr-22-19
	APP.	Joe Huff	Apr-22-19

DOC. REV. A/5

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.