1. Mechanical Dimensions:

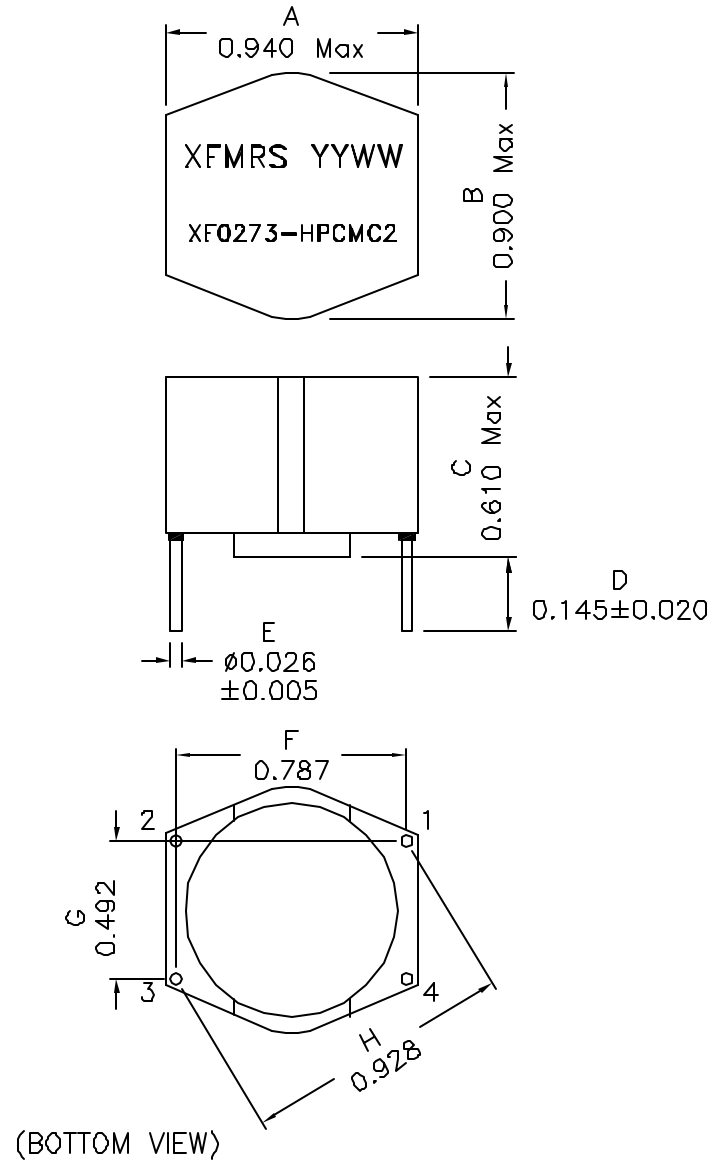

(BOTTOM VIEW)

2. Schematic:

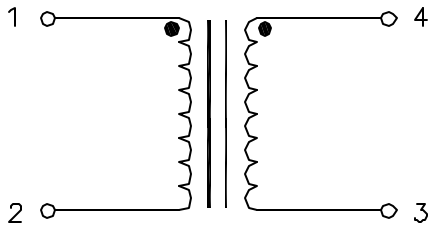

3. Electrical Specifications:@25°C

OCL: 2.7mH±30% @10KHz 0.05V, Each Wdg

DCR: 0.700 Ohms Max, Each Wdg

Rated Current: 0.60A

Isolation Voltage: 1500Vac, Wdg. to Wdg., 2 Sec

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRS Inc. www.XFMRS.com	Title: Common Mode Choke		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in INCH	P/N: XF0273-HPCMC2		REV. A
	DWN.	李小锋	Sep-16-05
	CHK.	龚玉坤	Sep-16-05
SHEET 1 OF 1	APP.	MS	Sep-16-05

DOC. REV A/1

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.