

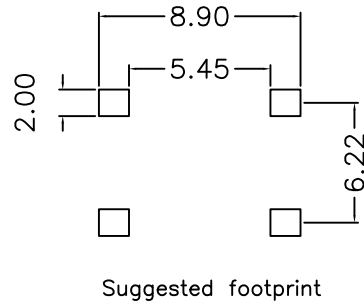
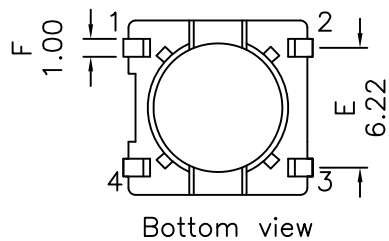
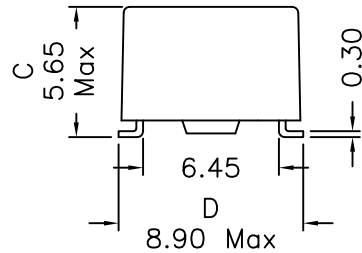


1. Mechanical Dimensions:



2. Schematic:



3. Electrical Specifications: @25°C

OCL: 3300uH±40% @10KHz, 0.1V (Each Wdg)

Rated Current: 650mAdc Max

Q: tbd Min @10KHz, 0.1V (Each Wdg)

SRF: Pins 1-2 tbd Min

DCR: 0.360 Ohms Max (Each Wdg)

LL: Pins 1-2 tbd @100KHz 0.1V Short Pins 4-3

Hipot: 300Vac Leakage current 1mA Max, 1 Min ,Wdg to Wdg,

Notes:


- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature: -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- SMD Lead Coplanarity: 0.004"(0.102mm) Max
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component
- Recommended IR Reflow peak temp of 250°C Max.

DOC. REV: B/1

XFMRs Inc. www.XFMRs.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF0334-CMC105	REV. B
		DWN.	Huo
		CHK.	YK Liao
		APP.	BSJ
SHEET 1 OF 2			Dec-07-18

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

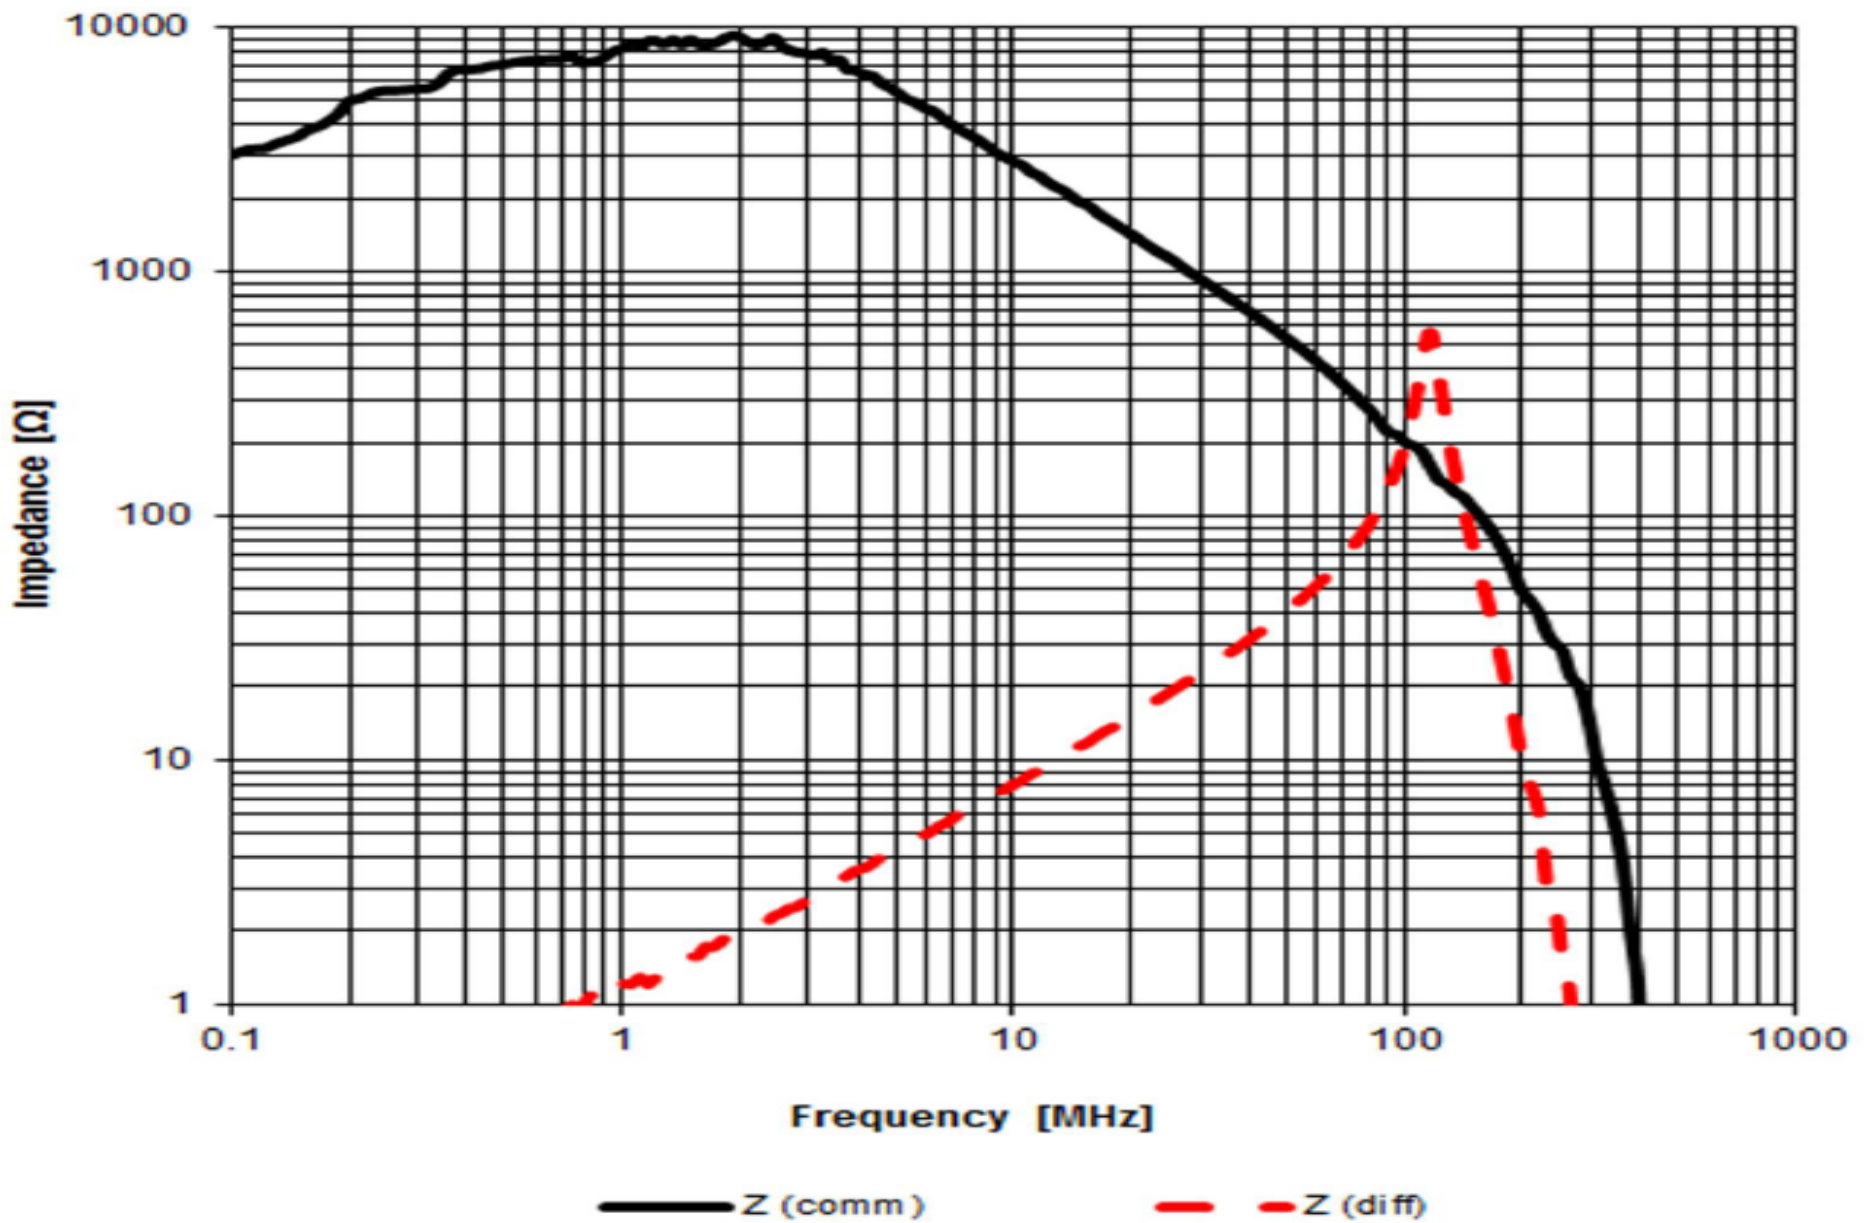

DOC. REV: B/1

XFMRs Inc. www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0334-CMC105	REV. B
	DWN.	Huo	Dec-07-18
	CHK.	YK Liao	Dec-07-18
SHEET 2 OF 2	APP.	BSJ	Dec-07-18