



1. Mechanical Dimensions:

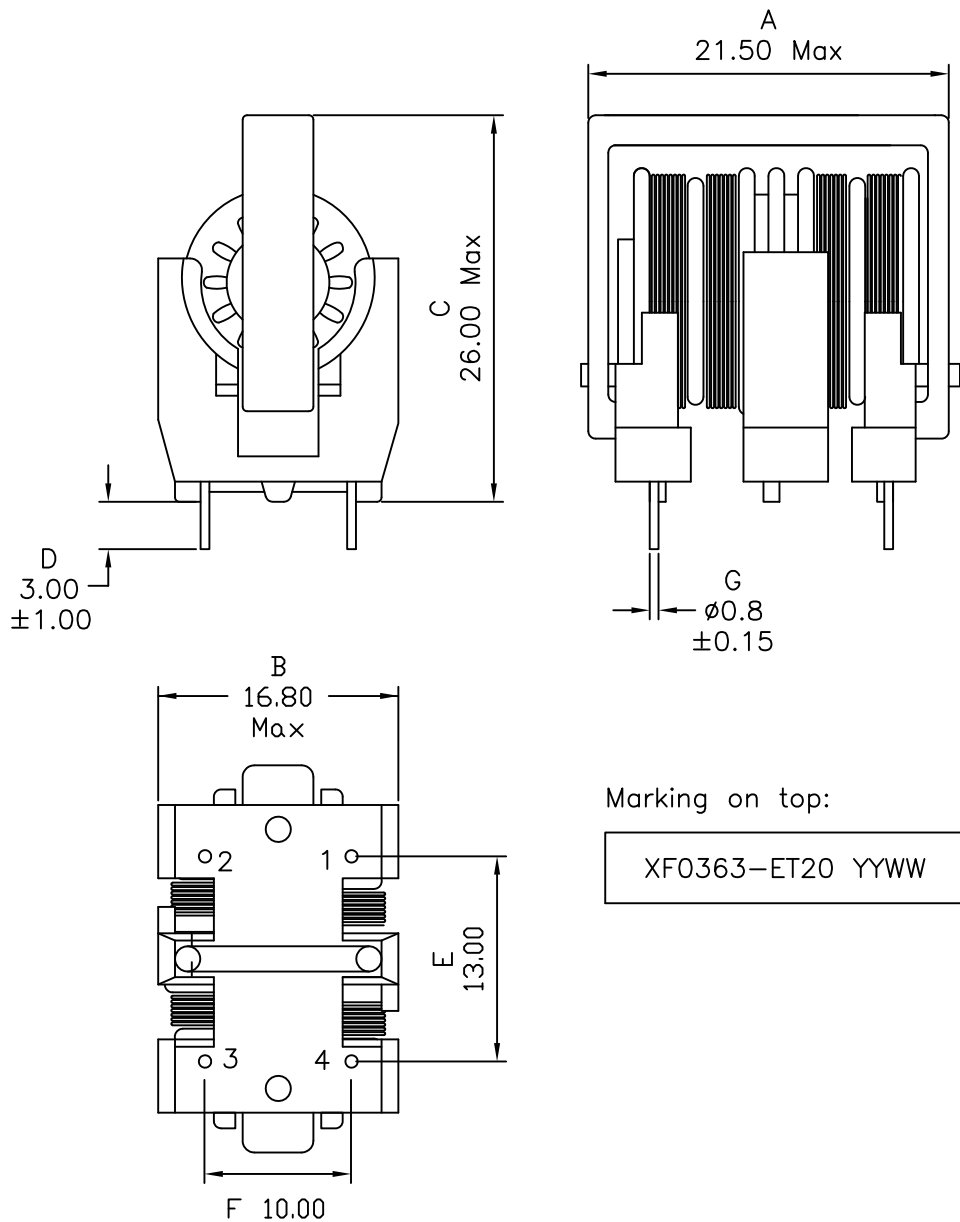

2. Schematic:

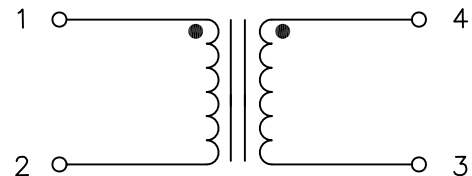

3. Electrical Specifications:

OCL: 36.0mH Min @100KHz 0.1V, Each Wdg

Q: tbd Min @100KHz 0.1V

LL: Pins 1-2 tbd Min @100KHz 0.1V, Short Pins 4+3

DCR: tbd Ohms Max, Each Wdg

Rated Current: 0.3Aac Max

Isolation Voltage: 1500Vac

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: XF0363-ET20
.xx ±0.30	DWN.	Yuan	Jan-16-14
Dimensions in mm	CHK.	YK Liao	Jan-16-14
SHEET 1 OF 1	APP.	DDC	Jan-16-14

DOC. REV: A/-

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.