


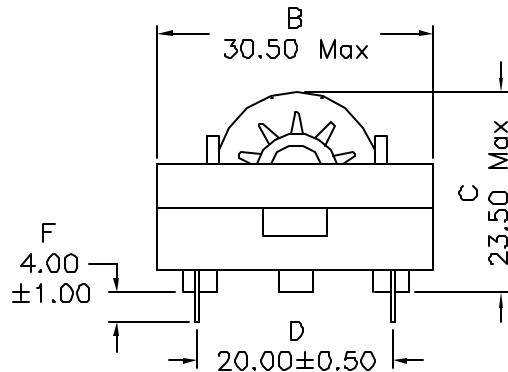



### 1. Mechanical Dimensions:

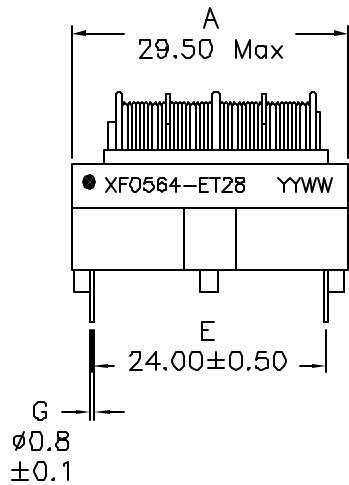

(BOTTOM VIEW)



### 2. Schematic:

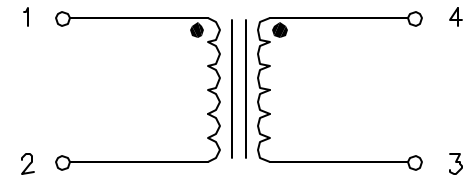

### 3. Electrical Specifications:

OCL: 5.6mH Min @10KHz 0.1V, Each Wdg

DCR: 0.155 Ohms ± 20%, Each Wdg

Rated Current: 1.80Aac

Hipot: 500Vac, Wdg to Wdg, Wdgs to Core

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

**PRELIMINARY**

DOC REV: A/1

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

<b>XFMRs Inc</b> www.XFMRs.com	Title: LINE FILTER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.30 Dimensions in mm	P/N: XF0564-ET28		REV. A
	DWN.	Juan Mao	Sep-21-06
	CHK.	YK Liao	Sep-21-06
SHEET 1 OF 1	APP.	Joe Huff	Sep-21-06