1. Mechanical Dimensions:

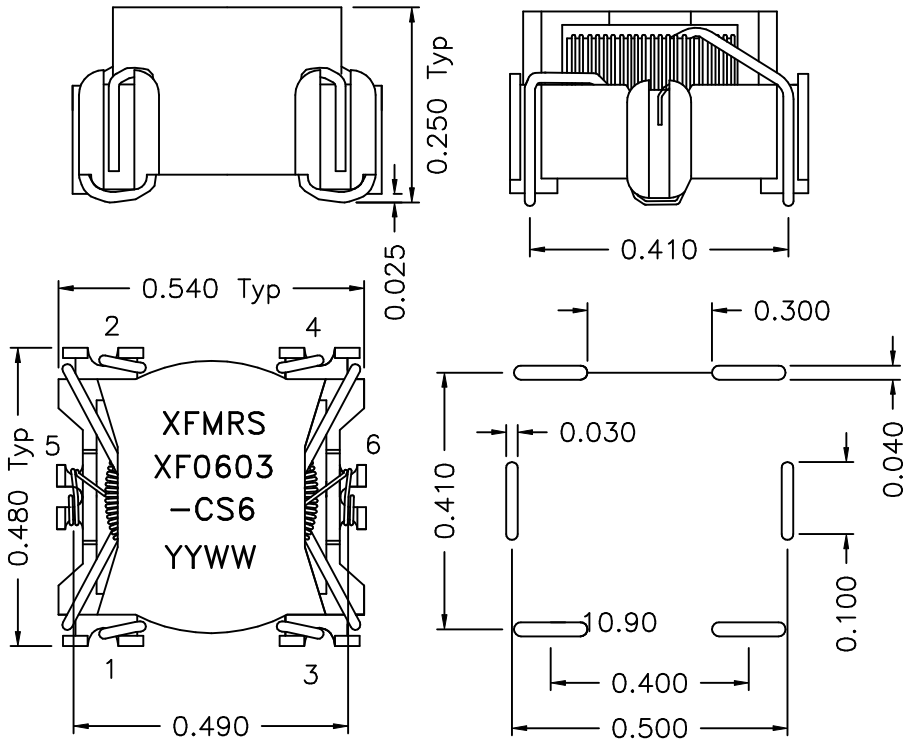

(SUGGESTED MOUNTING PAD)

2. Schematic:

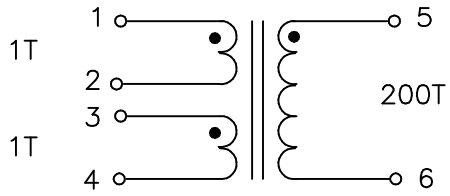

3. Electrical Specification:

HIPOT: 500Vrms Wire to Wire

OCL: 5–6 59.2mH Min @100KHz 20mV

DCR: 5–6 3.9 OHMS MAX

Rated Current: 16.4 Amps (reference only)

DOC. REV A/1

XFMRS Inc.	Title: Current Sense Xfmr		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 INCH Dimensions in INCH	P/N: XF0603–CS6		REV. A
	DWN.	袁玉坤	May–11–00
	CHK.	李清儿	May–11–00
SHEET 1 OF 1	APP.	Joe Huff	May–25–00

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION