

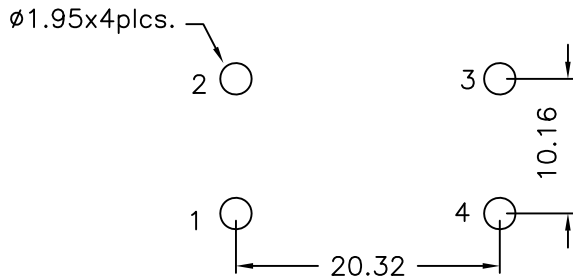


1. Mechanical Dimensions:

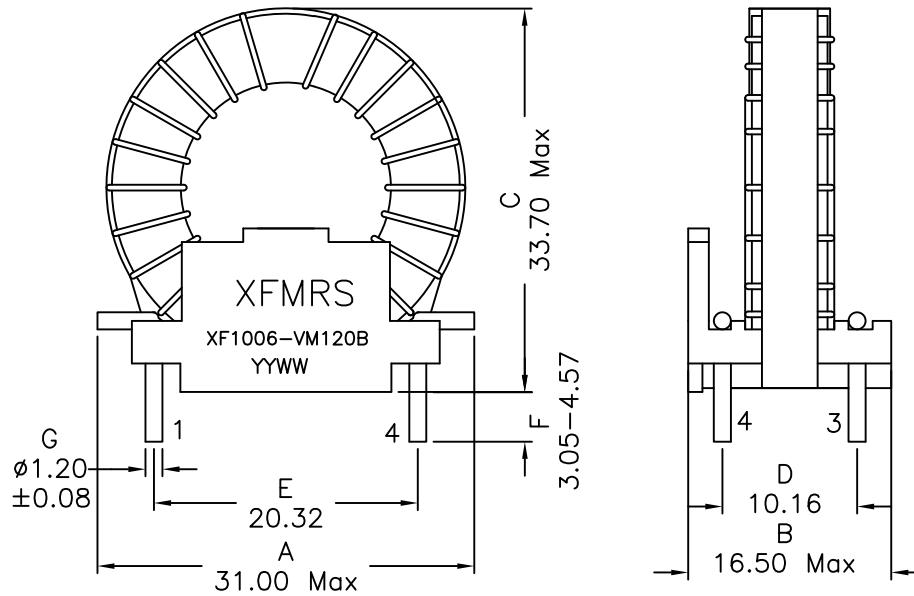

SUGGESTED FOOTPRINT

2. Schematic:



3. Electrical Specifications: @25C

- OCL: 100uH±15% @10KHz, 0.1V Each Wdg.
- Q: 80 Min @10KHz, 0.1V Each Wdg.
- Isat: 5Adc (30% drop in OCL) Each Wdg.
- Rated: Pins 1-3 3A (40°C temp rise) Each Wdg.
- DCR: 0.035 OHMS Max. Each Wdg.
- Isolation: 500VAC, Wdg. to Wdg.

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRs.com	Title: Dual Inductor		
	UNLESS OTHERWISE SPECIFIED	P/N: XF1006-VM120B	REV. A
TOLERANCES: .xx ±0.20	DWN.	Yuan	Feb-02-15
Dimensions in mm	CHK.	YK Liao	Feb-02-15
SHEET 1 OF 1	APP.	BSJ	Feb-02-15

Doc Rev: A/3