1. Mechanical Dimensions:

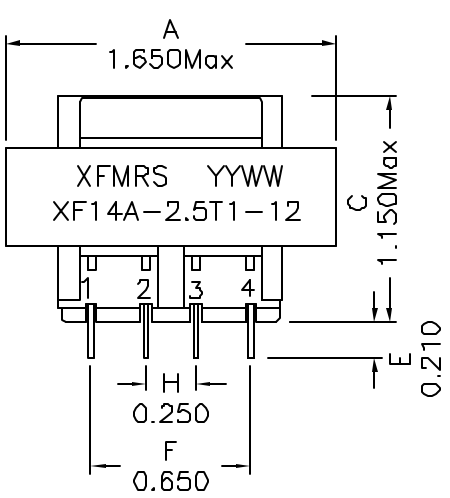

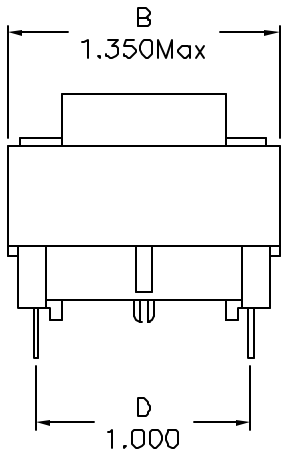

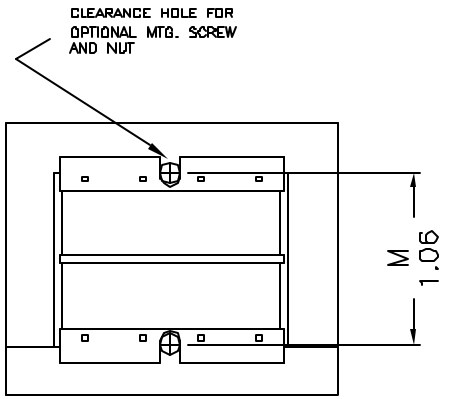

BOTTOM VIEW

2. Schematic:

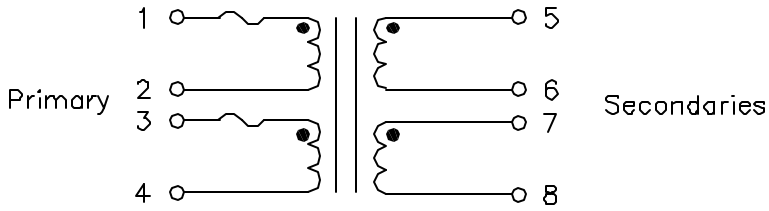

3. Electrical Specifications:

Primary: Pins 1-2 / 3-4 115/230V 50/60Hz

Ex I: Pins 1-2 30mA Max 120V 60Hz or 100V 50Hz

Parallel Sec: 6.3V @ 0.40Aac

Series Sec: 12.6V @ 0.20Aac

HIPOT: 2500Vac Pri-Sec, Wdgs-Core

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: -20°C to +85°C
6. UL 506 approved file #E238841
7. 130°C TP in each primary wdg.

XFMRS Inc	Title: Power Xfmr		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010 Dimensions in INCH	P/N: XF14A-2.5T1-12		REV. A
	DWN.	罗振江	Nov-18-04
	CHK.	袁玉坤	Nov-18-04
Scale 1.5:1 SHT 1 OF 1	APP.	Joe Huff	Nov-18-04

DOC. REV A/1

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.