
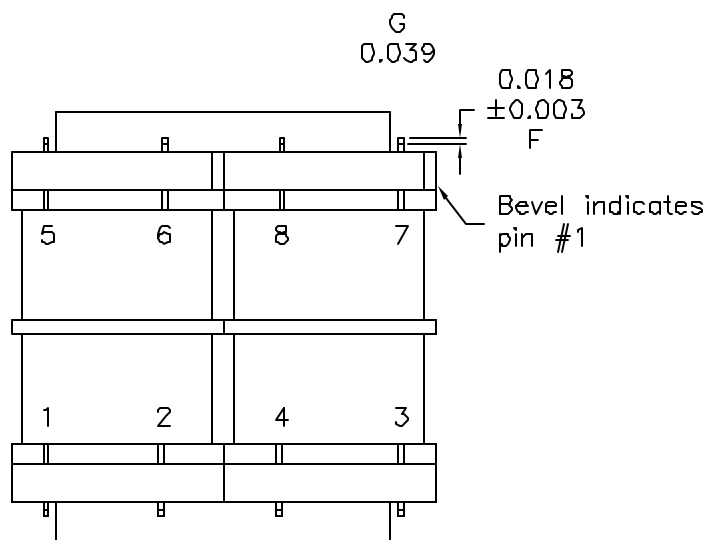



### 1. Mechanical Dimensions:

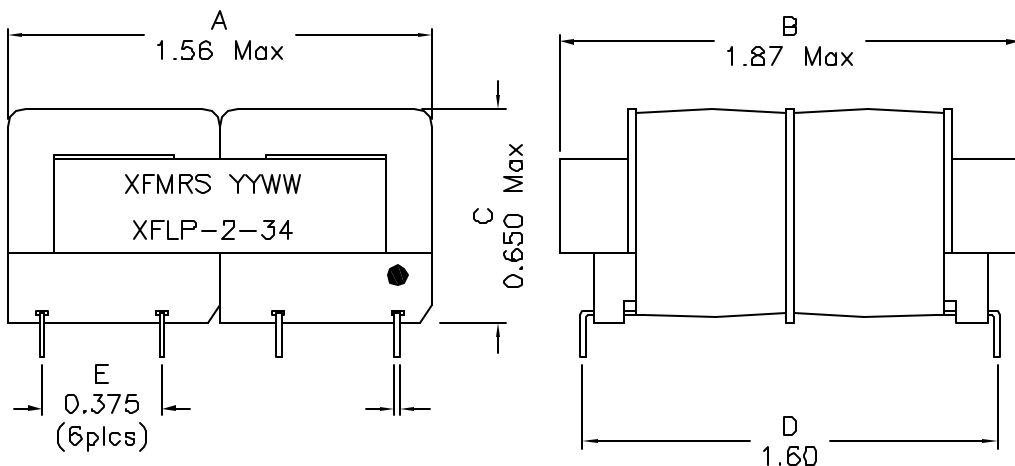

Bottom View

Pin Numbers are shown for ref only.

### 2. Schematic:

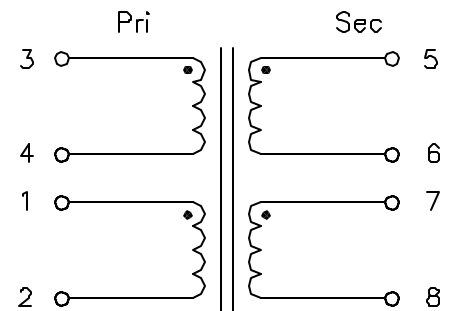

### 3. Electrical Specifications:

- INPUT: 115V/230V 50/60Hz
- OUTPUT: Pins 5-6 17V @ 0.075A
- OUTPUT: Pins 7-8 17V @ 0.075A
- HIPOT: 2500Vac Pri to Sec
- HIPOT: 1500Vac Pri to Core
- HIPOT: 500Vac Sec to Sec & Core

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151558
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

<b>XFMRS Inc</b> www.XFMRS.com		Title: <b>2VA UI TRANSFORMER</b>	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010	P/N: XFLP-2-34		REV. A
	DWN.	李小锋	Oct-17-08
Dimensions in Inches	CHK.	廖玉坤	Oct-17-08
	SHT 1 OF 1	APP. BW	Oct-17-08

DOC. REV. A/1