

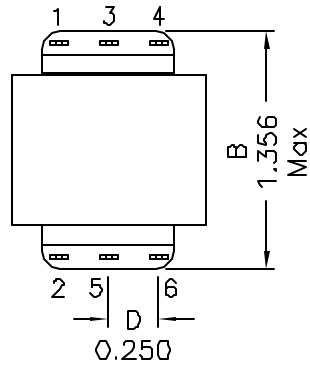



1. Mechanical:

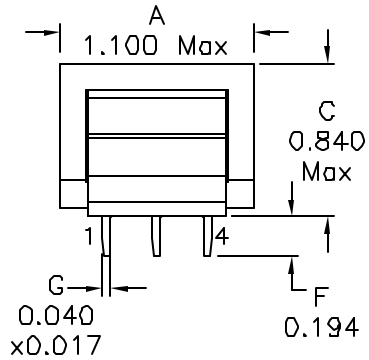

(BOTTOM VIEW)

Marking: (on Top)




Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/1

2. Schematic:



3. Electrical:

Primary: Pins 1-2 115V 50/60Hz
 Series Sec: 12.6Vct @ 70mAac
 Parallel Sec: 6.3V @ 140mAac
 HIPOT: 1500Vac Pri-Sec, Wdgs-Core

XFMRS Inc www.XFMRS.com		Title: Power xfmr	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.010 Dimensions in Inch Scale 2.5:1 SHT 1 OF 1		P/N: XFPC-12-70	REV. A
		DWN.	李小锋 Nov-01-06
		CHK.	廖玉坤 Nov-01-06
		APP.	BW Nov-01-06