1. Mechanical Dimensions:

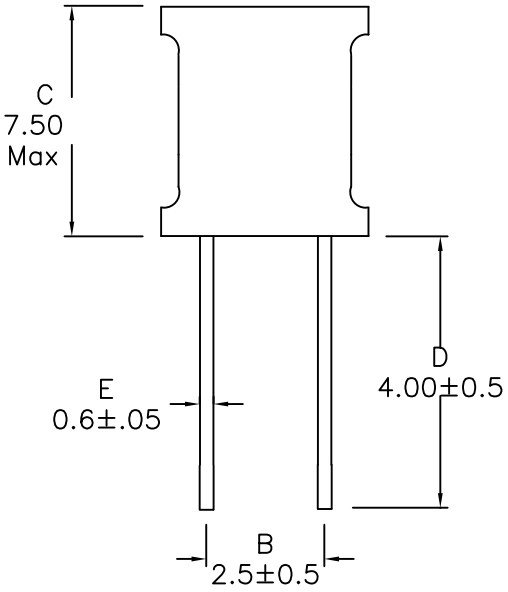



Bottom view



Top view

2. Schematic:



3. Electrical Specifications: 25°C

OCL: 470uH±10% @100KHz, 0.1V

Q: 55 @796KHz, 0.1V

DCR: 6.50 Ohms Max

SRF: 1.5MHz Min

Isat: 0.14A (Based on 30% drop in OCL)

Irms: 0.14A (Based on 20°C Temp Rise)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRS Inc. www.XFMRS.com	Title: Radial Leaded Inductor		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.10 Dimensions in MM	P/N: XFRL0608A-471K		REV. A
	DWN.	Yuan	Jul-08-15
	CHK.	YK Liao	Jul-08-15
SHEET 1 OF 1	APP.	DDC	Jul-08-15

Doc. Rev: A/2

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.