1. Mechanical Dimensions:

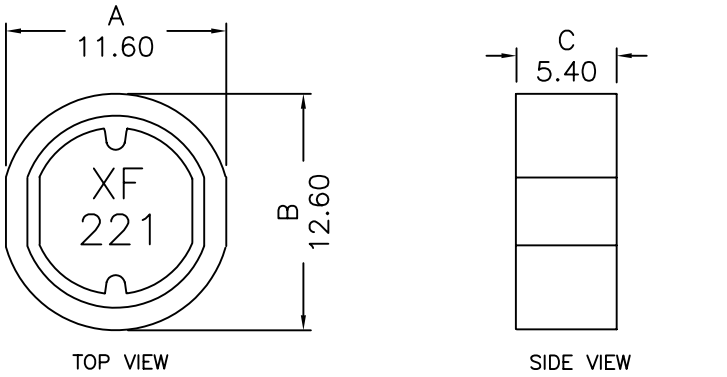

2. Schematic:



3. Electrical Specifications:@25C

OCL: 220uH±10% @1.0KHz 1V

Q: 2.0 Min @1.0KHz 1V

DCR: 0.624 Ohms Max

IDC: 0.70Adc Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

XFMRS Inc www.XFMRS.com	Title: XFSDR125SH SERIES INDUCTORS		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM	P/N: XFSDR125SH-221K		REV. A
	DWN.	Mei Chen	Jan-05-10
	CHK.	YK Liao	Jan-05-10
SHT 1 OF 1	APP.	BW	Jan-05-10

DOC. REV: A/1

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.