
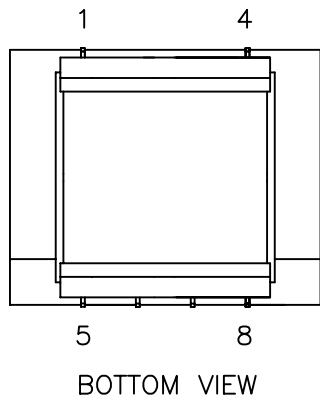
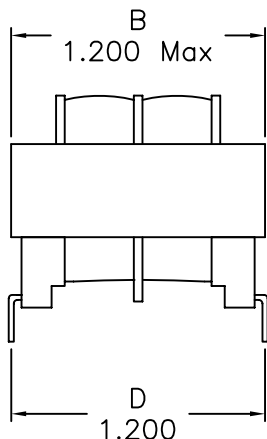



1. Mechanical Dimensions:

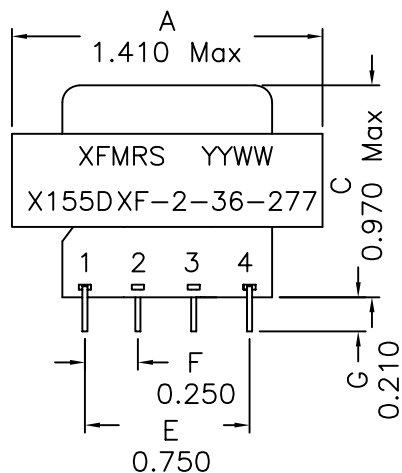

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

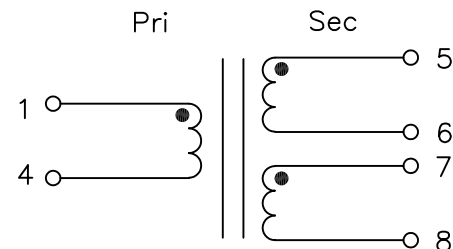

3. Electrical Specifications:

Primary: Pins 1-4 277V 50/60Hz

Ex I: Pins 1-4 tbdmA Max 120V 60Hz or 100V 50Hz

Parallel Sec: 18.0V @ 0.060Aac

Series Sec: 36.0V @ 0.030Aac

DC Res.: Pins 1-4 4259±15% Ohms

DC Res.: Pins 5-6 49.0±15% Ohms

DC Res.: Pins 7-8 49.0±15% Ohms

HIPOT: 2500Vac Pri-Sec, Wdgs-Core

DOC. REV A/1

XFMRS Inc www.XFMRS.com		Title: Power Xfmr	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010 Dimensions in INCH	P/N: XF-2-36-277		REV. A
	DWN.	罗振江	Jan-14-09
	CHK.	廖玉坤	Jan-14-09
Scale 1.5:1 SHT 1 OF 1	APP.	BW	Jan-14-09

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.