



### 1. Dimensions:

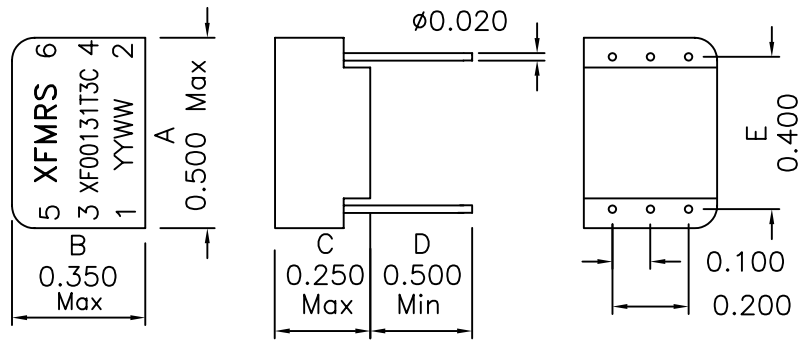

### 2. Schematic:

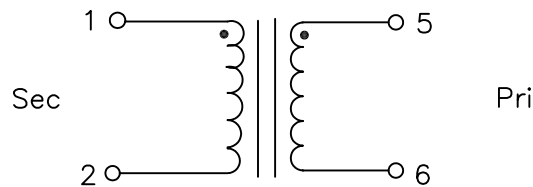

### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms (PRI/SEC)  
 Turns Ratio: 1:1.36±5% (PRI:SEC)  
 PRI OCL: 1.2mH Minimum @100KHz 50mV  
 PRI LL: 0.80uH Maximum @100KHz 50mV (SEC Shorted)  
 Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)  
 PRI DCR: 0.70 Ohms Maximum  
 SEC DCR: 0.80 Ohms Maximum

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: -40°C to +85°C

DOC. REV A/1

<b>XFMRs Inc</b>	Title: TRANSFORMERS		
	UNLESS OTHERWISE SPECIFIED	P/N: XF00131T3C	REV. A
TOLERANCES: .xxx ±0.010	DWN.	廖玉坤	Apr-29-04
Dimensions in Inch	CHK.	李清儿	Apr-29-04
SCALE 2:1 SHT 1 OF 1	APP.	BW	Apr-29-04