

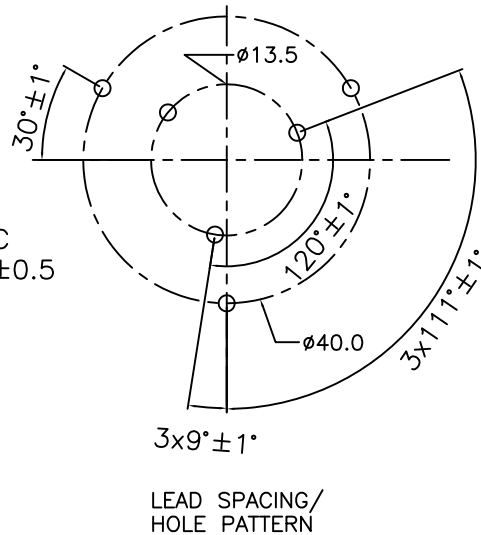
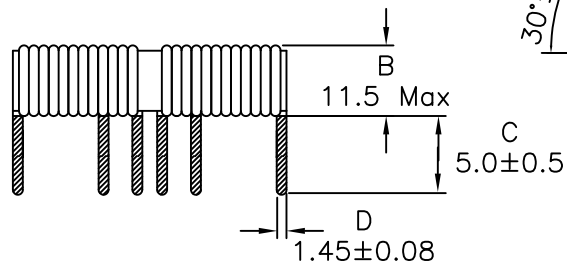


1. Mechanical Dimensions:

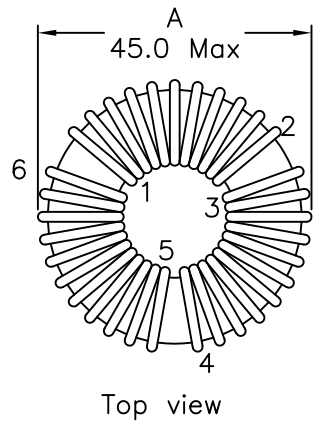

2. Schematic:

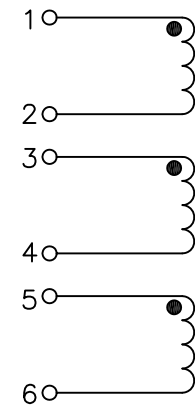

3. Electrical Specifications:@25°C

OCL: 1mH±30% @10KHz 0.1V, Each wdg

tbduH Min @10KHz 0.1V, Each wdg, -40°C to 0°C

Q: Pins 1-2 tbd Min @10KHz 0.1V

DCR: 12.0 mOhms Max, Each Wdg

Rated Current: 10A (Balanced)

Turns Ratio: (1-2):(3-4):(5-6)=1:1:1±2%

Hipot: 500Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

Doc. Rev. A/-

XFMRs Inc. www.XFMRS.com	Title: CMC		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0013A-3HOCMC	REV. A
TOLERANCES: .xx ±0.25	DWN.	Mei Chen	Apr-06-17
Dimensions in MM	CHK.	YK Liao	Apr-06-17
SHEET 1 OF 1	APP.	BW	Apr-06-17

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.