



### 1. Mechanical Dimensions:

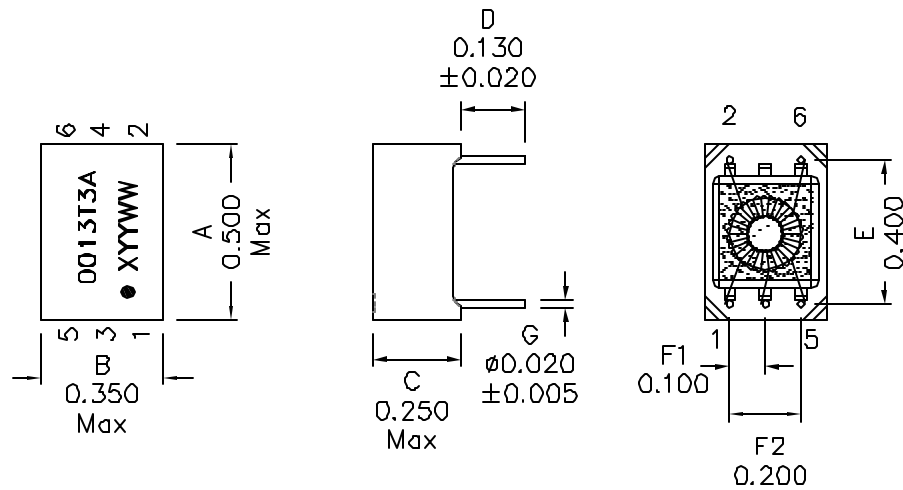

### 2. Schematic:



### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms

Turns Ratio: P2-6:P3-5:P1-3 1:1:0.26 ±10%

PRI OCL: 1.5mH Min @100KHz 50mV

Q: 5 Min @10KHz 50mV

PRI LL: 0.40uH Max @100KHz, 50mV SEC SHORTED

PRI/SEC Cw/w: 40pF Max @100KHz 50mV

DCR: P1-5 0.90 Ohms Max

DCR: P2-6 0.70 Ohms Max

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151558
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/4

<b>XFMRS Inc</b> www.XFMRS.com		Title: T1/CEPT/ISDN-PRI TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED		P/N: XF0013T3A	REV. A
TOLERANCES:		DWN.	Feng
.xxx ±0.010		CHK.	YK Liao
Dimensions in Inch		APP.	Joe Huff
SHT 1 OF 1			Jun-28-11

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.