



1. Mechanical Dimensions:

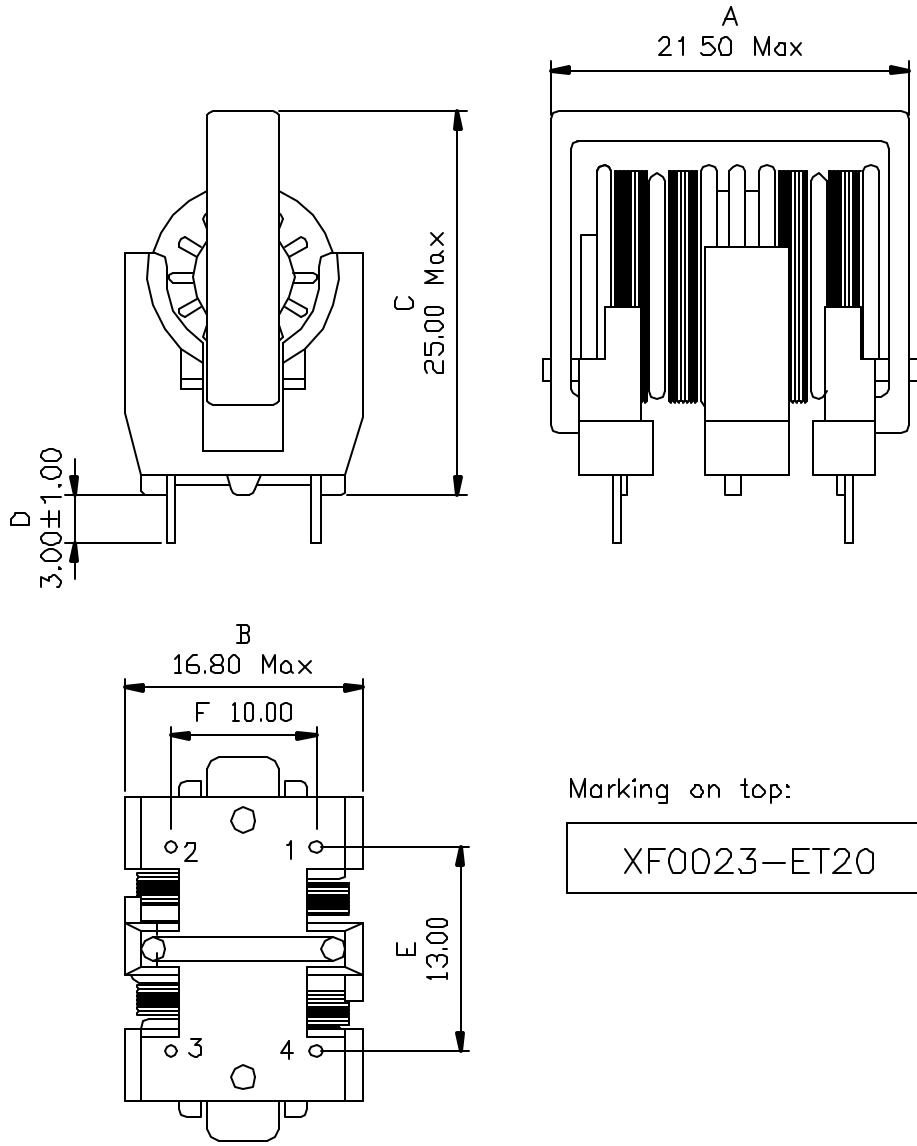

2. Schematic:

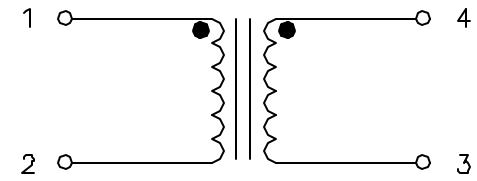

3. Electrical Specifications:

OCL: 2mH Min @10KHz 0.1V, Each Wdg

OCL DIFF.: 50uH Max

DCR: 0.200 Ohms Max, Each Wdg

Rated Current: 1.5Aac Max

Isolation Voltage: 2000Vac

Notes:

1. Solderability. Leads shall meet MIL-STD-202, Method 20BD for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151558
5. Operating Temperature Range. All listed parameters are to be within tolerance from -20°C to +115°C
6. Storage Temperature Range: -55°C to +125°C

DOC REV: A/1

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0023-ET20	REV. A
TOLERANCES:	DWN.	罗振江	Jan-09-04
.xx ±0.30	CHK.	廖玉坤	Jan-09-04
Dimensions in mm	APP.	MS	Jan-09-04
SHEET 1 OF 1			