

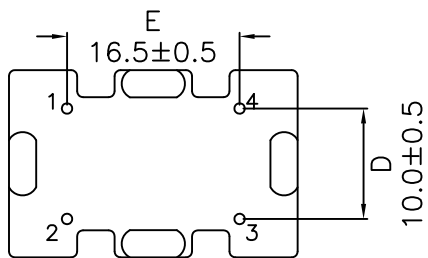


1. Mechanical Dimensions:

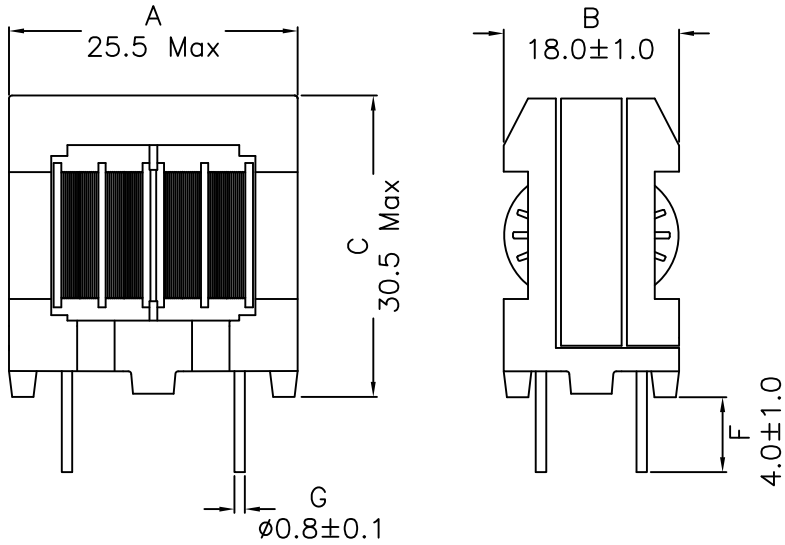


(BOTTOM VIEW)

Marking: (on TOP)



2. Schematic:

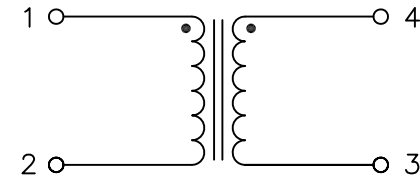

3. Electrical Specifications:

- OCL: 3.0mH Min @10KHz 0.1V, Each Wdg
- Q: tbd Min @10KHz 0.1V, Each Wdg
- DCR: 0.080 Ohms Max, Each Wdg
- Rated Current: 2.5Arms Max
- Rated Voltage: 250Vrms Max
- HIPOT: 2000Vac 1 min, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -20°C to +155°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRS Inc www.XFMRS.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XFO033-ET24	REV. A
.xx ±0.25	DWN.	刘 鹏	Jul-29-14
Dimensions in mm	CHK.	李小锋	Jul-29-14
Scale 2:1 SHT 1 OF 1	APP.	DDC	Jul-29-14

DOC REV: A/-