

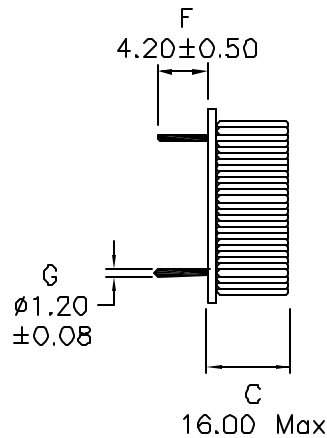
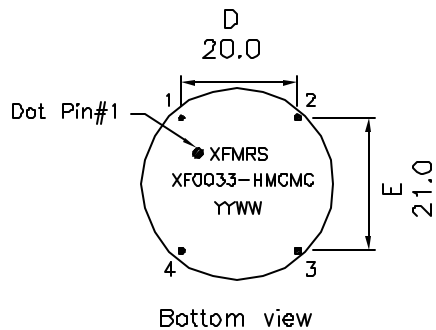


1. Mechanical Dimensions:



2. Schematic:

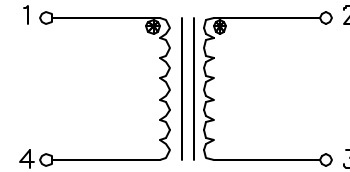

3. Electrical Specifications: @25°C

OCL: 3.0mH±30% @10KHz 0.1V, Each Wdg

OCL: 1.2mH Min @10KHz 0.1V -40°C

Q: 10 Min @10KHz 0.1V, Each Wdg

DCR: 9 mOhms Typ, Each Wdg

CURRENT RATING: 6A

Hipot: 1500Vac for 2 Sec Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. Lead spacing is uncontrolled.

DOC REV: C/4

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc. www.XFMRs.com		Title: COMMON MODE CHOKE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF0033-HMCMC	REV. C
	DWN.	Xiany	Mar-03-09
	CHK.	YK Liao	Mar-03-09
SHEET 1 OF 1	APP.	Joe Huff	Mar-03-09