
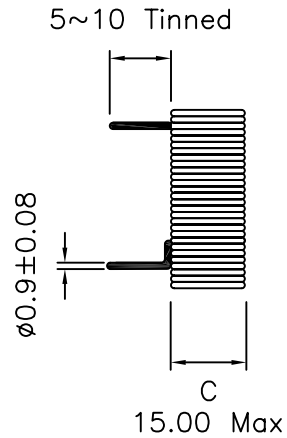




1. Mechanical Dimensions:



Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. Lead spacing is uncontrolled.

2. Schematic:

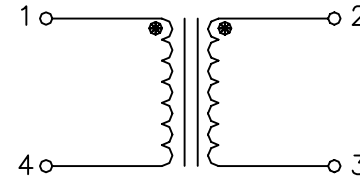

3. Electrical Specifications: @25°C

OCL: 3.0mH±30% @10KHz 0.1V, Each Wdg

DCR: 9 mOhms Typ, Each Wdg

CURRENT RATING: 6A

Hi-pot: 1500Vac for 2 Sec Wdg to Wdg

DOC REV: A/1

XFMRs Inc. www.XFMRS.com		Title: COMMON MODE CHOKE	
UNLESS OTHERWISE SPECIFIED		P/N: XF0033-HOCMC	
TOLERANCES: .xx ±0.25		DWN.	Juan Mao
Dimensions in MM		CHK.	YK Liao
SHEET 1 OF 1		APP.	BW
		REV. A	Dec-29-08
			Dec-29-08
			Dec-29-08