



1. Mechanical Dimensions:

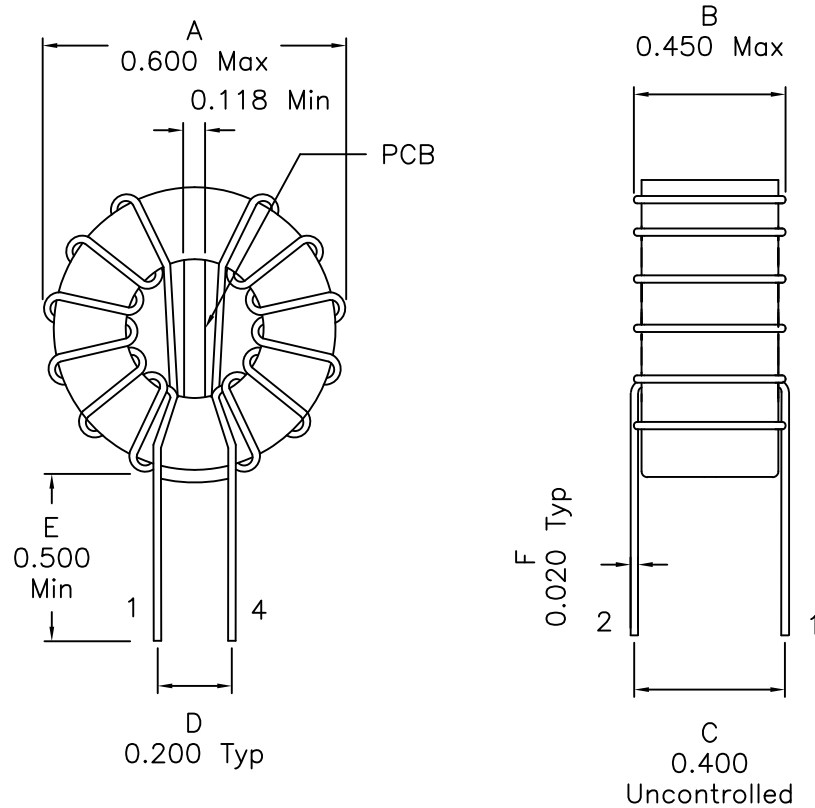

Note:

Leads tinned to 1/16" of body

2. Schematic:



3. Electrical Specifications: @25C


OCL: 3.0mH±30% @1KHz 1.0V, Each Wdg
 Q: 3.0 Min @1KHz 1.0V, Each Wdg
 DCR: 0.075 Ohms Max, Each Wdg
 IDC: 2Adc Max
 Isolation: 2500Vrms

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRs.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.015 Dimensions in Inch		P/N: XF0033-VOCMC1A	REV. A
		DWN.	Yuan Jan-28-15
		CHK.	YK Liao Jan-28-15
SHEET 1 OF 2		APP.	BW Jan-28-15

DOC REV: A/3

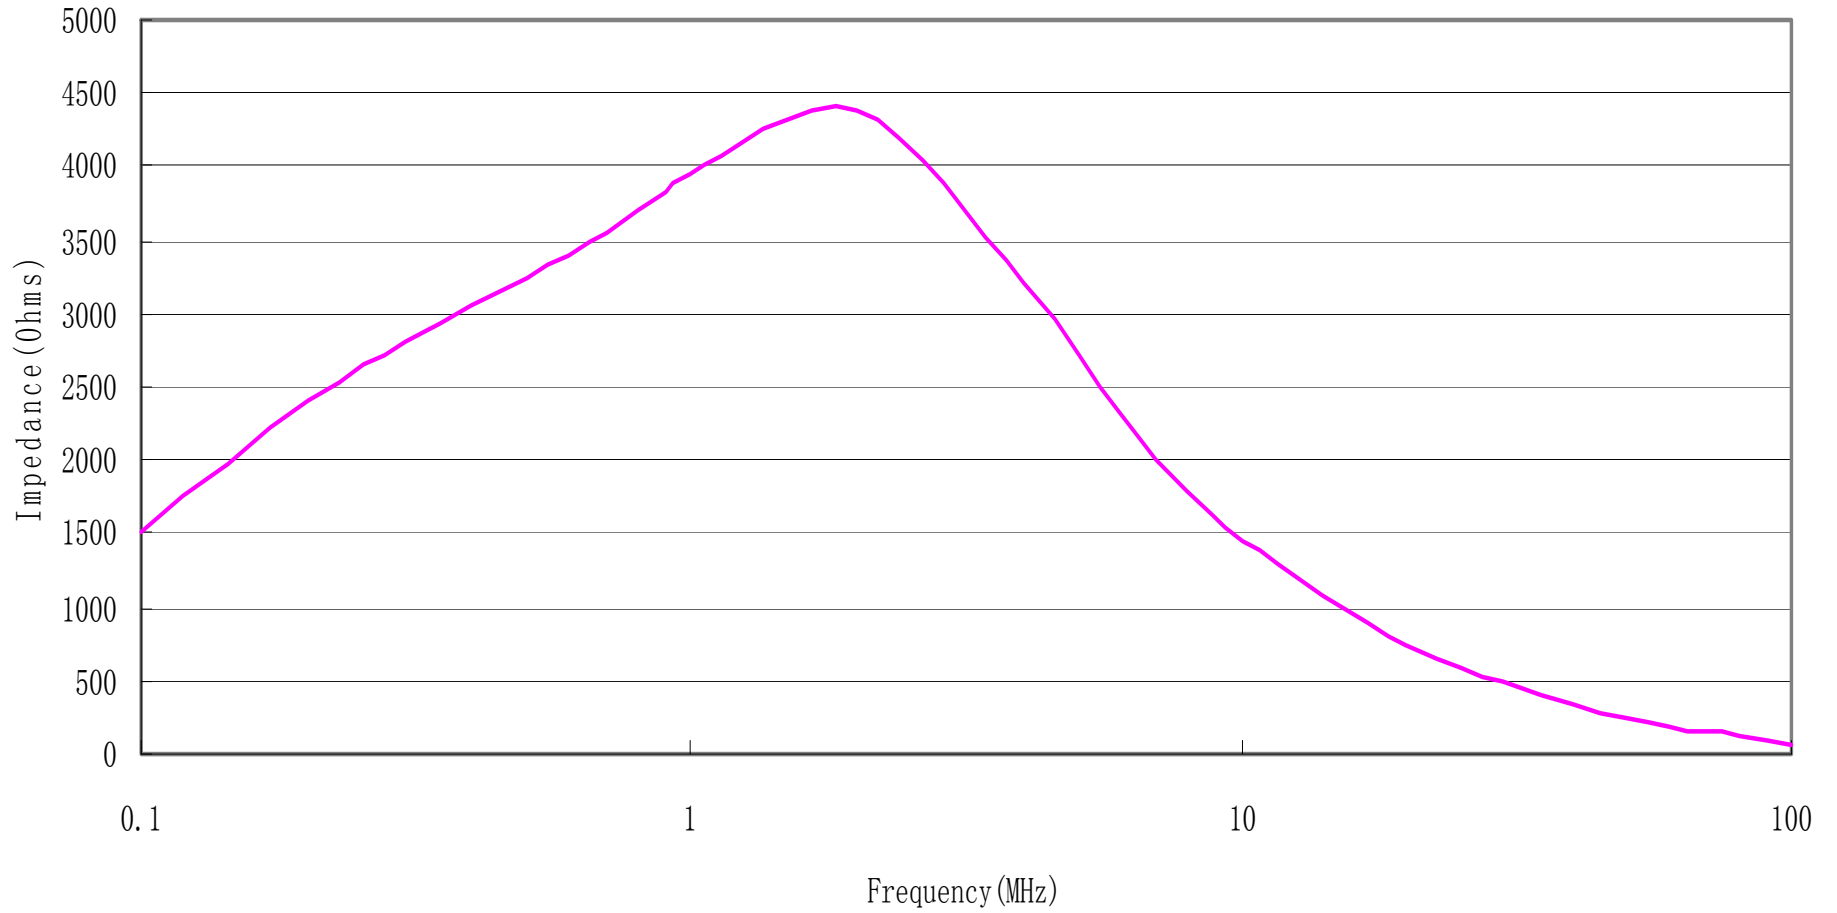

DOC REV: A/3

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke			
	UNLESS OTHERWISE SPECIFIED		P/N: XF0033-VOCMC1A	REV. A
TOLERANCES:		DWN.	Yuan	Jan-28-15
.xxx ±0.015		CHK.	YK Liao	Jan-28-15
Dimensions in Inch		APP.	BW	Jan-28-15
SHEET 2 OF 2				

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.