



1. Mechanical Dimensions:

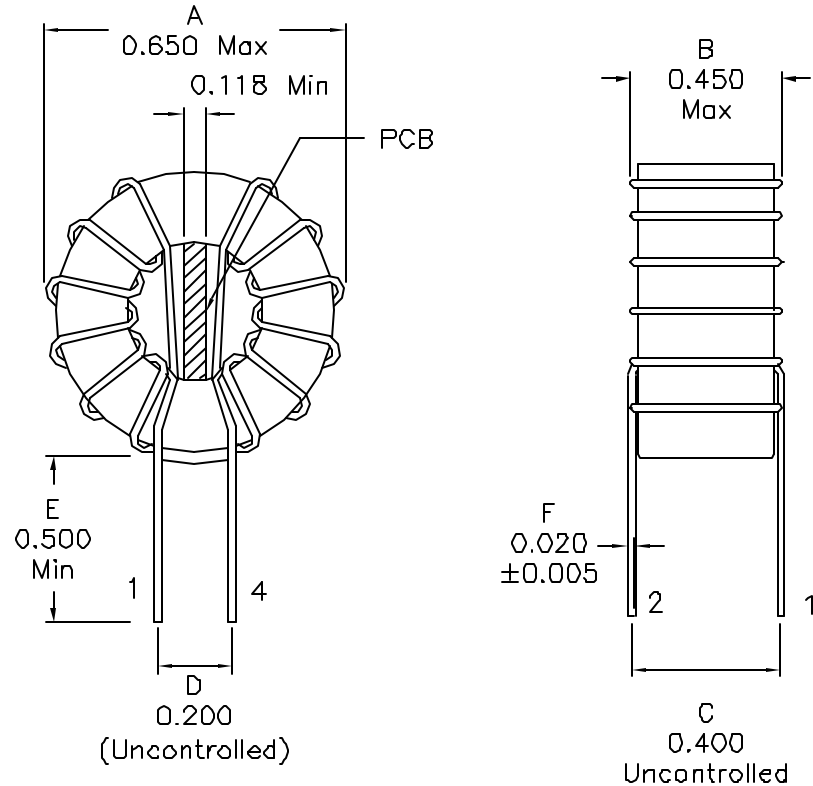

Note:

Leads tinned to 1/16" of body

2. Schematic:



3. Electrical Specifications:

OCL: 3.3mH±15% @1KHz 1.0V, Each Wdg

DCR: 0.060 Ohms Max, Each Wdg

Irms: 3A Max

Isolation: 2500Vrms

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.015 Dimensions in Inch	P/N: XF0033-VOCMC1B	REV. A	
	DWN.	Juan mao	May-10-07
SHEET 1 OF 1	CHK.	YK Liao	May-10-07
	APP.	Joe Huff	May-10-07