



1. Mechanical Dimensions:

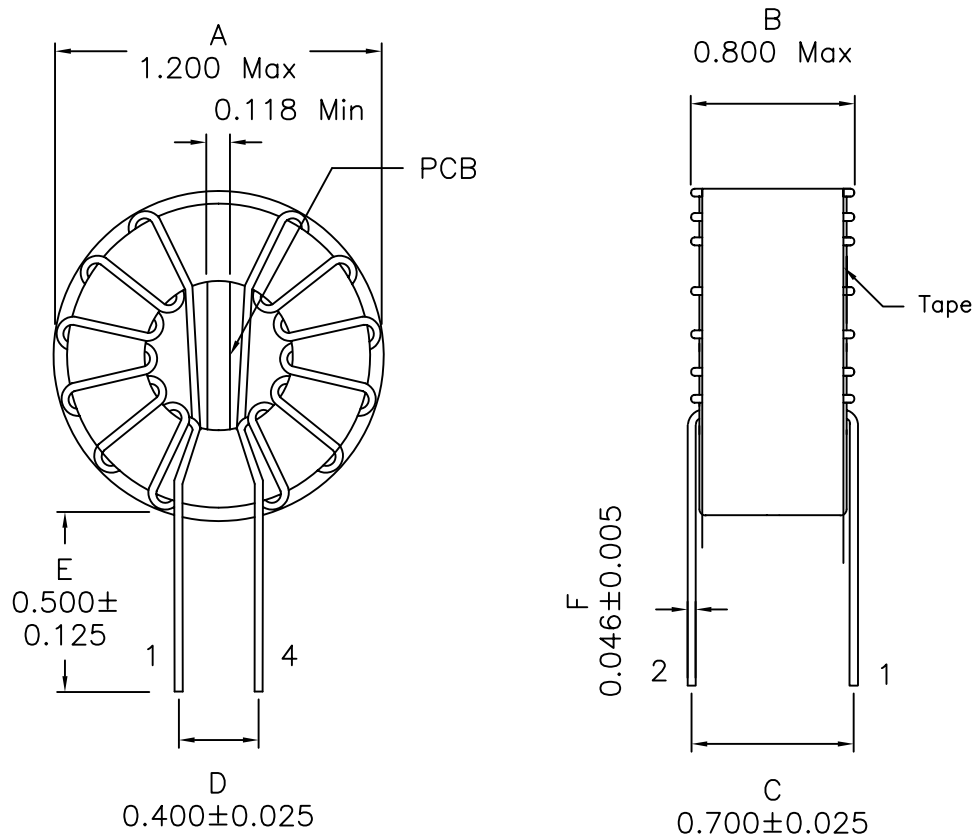

2. Schematic:

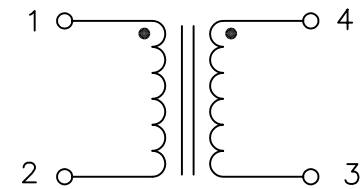

3. Electrical Specifications:

OCL: 3.0mH ± 30% @ 1KHz 1.0V, Each Wdg

DCR: 0.020 Ohms Max, Each Wdg

Rated I: 10Adc Max

Isolation: 3750Vrms

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc
www.XFMRs.com

Title:
Common Mode Choke

UNLESS OTHERWISE SPECIFIED

P/N: XF0033A-VOCMC4

REV. A

TOLERANCES:
.xxx ± 0.015

DWN.

Kang Chen

Jan-04-10

Dimensions in Inch

CHK.

YK Liao

Jan-04-10

SHEET 1 OF 1

APP.

BW

Jan-04-10

DOC REV: A/1

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.