
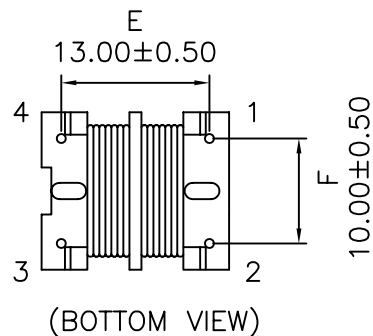



1. Mechanical Dimensions:

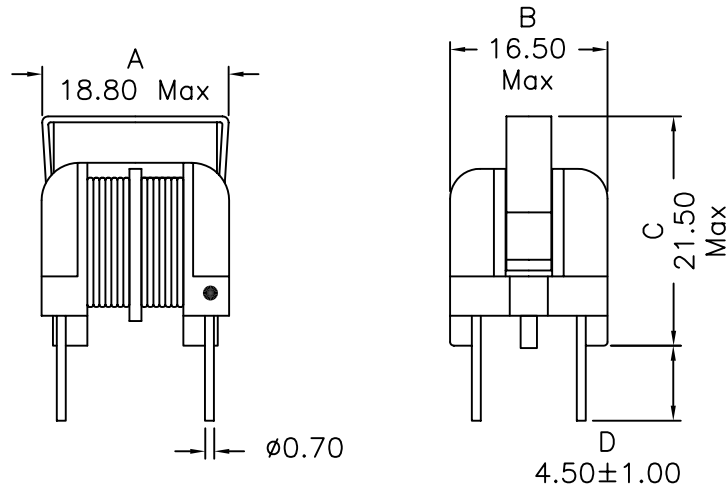

MARKING: (ON TOP OF CLIP)

XF0063-00U3 YYWW

2. Schematic:

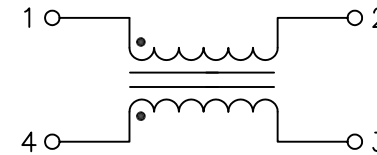

3. Electrical Specifications:

OCL: 6.0mH Min @1KHz 0.1V Each Wdg.

3.5mH Min @1KHz 0.1V -40°C to -20°C

Q: P1-2 8 Min @1KHz 0.1V

DCR: 0.500 Ohms Max Each Wdg.

Rated Current: 0.90A Max

HI-POT: 2000VAC 1 second (PIN1-2 TO PIN3-4)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: $> 28\%$
4. Insulation System: Class F 155°C . UL file E151556
5. All listed parameters are to be within tolerance from -40°C to $+85^{\circ}\text{C}$ unless otherwise noted.
6. Storage Temperature Range: -55°C to $+125^{\circ}\text{C}$
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV. A/3

XFMRs Inc www.XFMRS.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0063-00U3	REV. A
TOLERANCES: .xx ± 0.25	DWN.	Xianyi	Sep-01-09
Dimensions in MM	CHK.	YK Liao	Sep-01-09
SHEET 1 OF 1	APP.	BW	Sep-01-09