

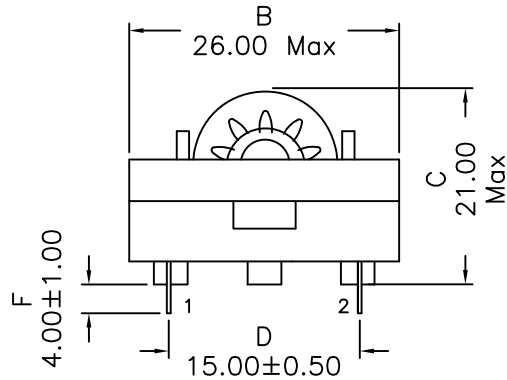


1. Mechanical Dimensions:

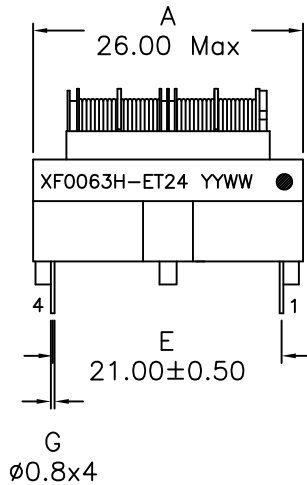


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -20°C to +155°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

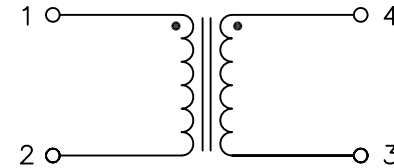

3. Electrical Specifications: @25°C

OCL: 6.0mH Min @10KHz 0.1V, Each Wdg

2.4mH Min @10KHz 0.1V, Each Wdg -20°C to 0°C

Q: 5.0 Min @10KHz 0.1V, Each Wdg

LL: P1-2 120uH Max @100KHz 0.1V, Short P4+3

DCR: 0.250 Ohms Max, Each Wdg

Rated Current: 1.6Arms Max

Rated Voltage: 250Vrms Max


HIPOT: 2000Vac 1 min, Wdg to Wdg

Turns Ratio: (1-2):(4-3)=1:1±2%

SRF: P1-2 250KHz Min

DOC REV: A/-

XFMRs Inc www.XFMRs.com	Title: COMMON MODE CHOKE			
	UNLESS OTHERWISE SPECIFIED	P/N: XF0063H-ET24	REV. A	
TOLERANCES: .xx ±0.25	DWN.	Yuan	Dec-10-15	
Dimensions in mm	CHK.	YK Liao	Dec-10-15	
SHEET 1 OF 2	APP.	Joe Huff	Dec-10-15	

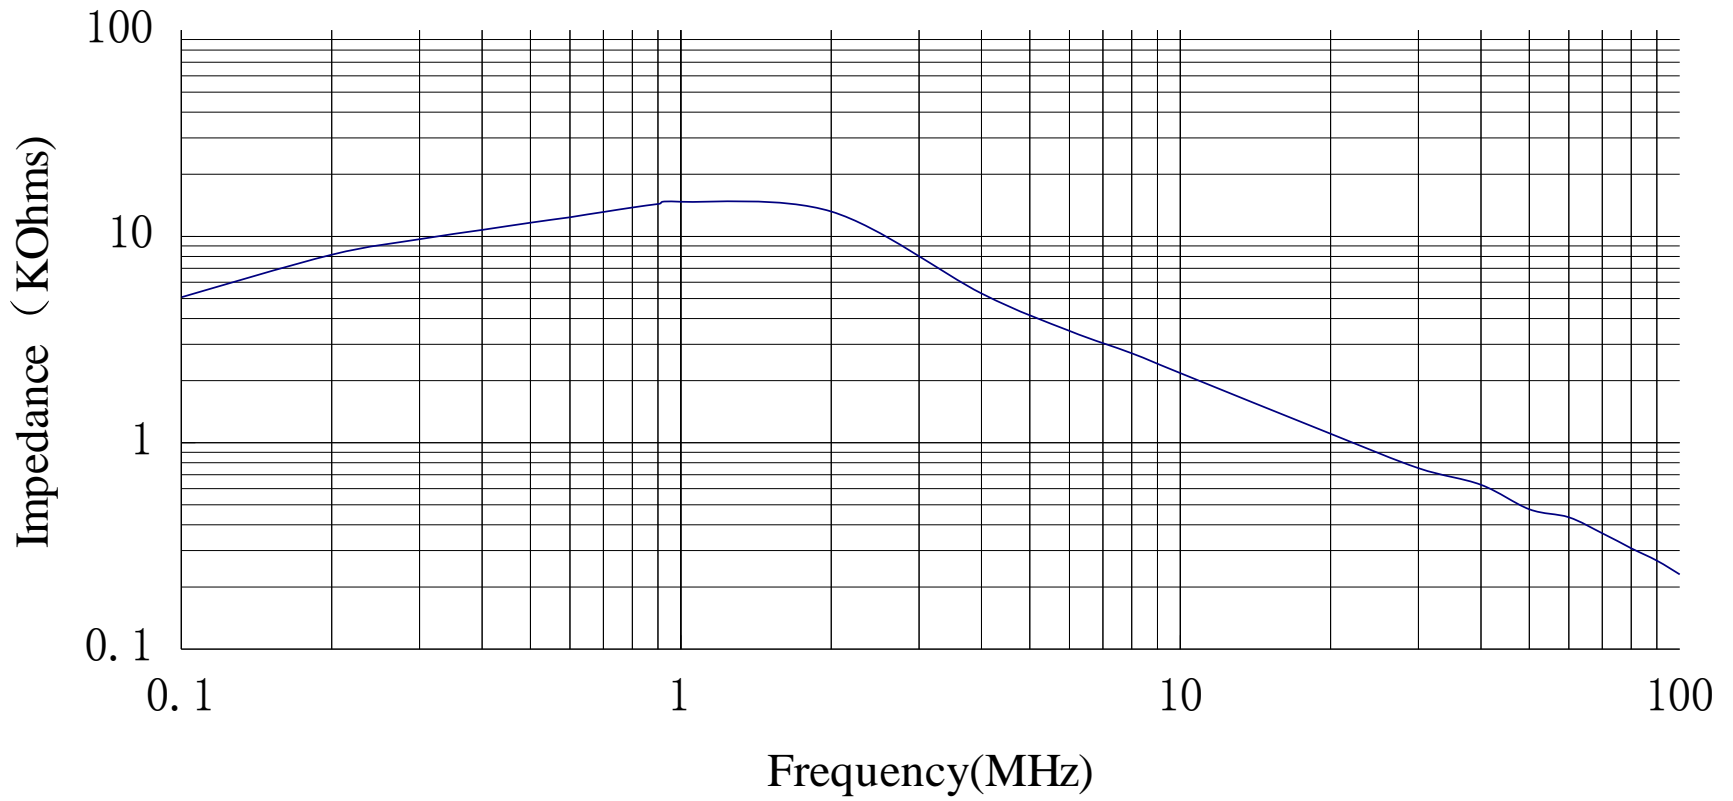

DOC REV: A/-

XFMRs Inc www.XFMRS.com UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in mm	Title: COMMON MODE CHOKE		
	P/N: XF0063H-ET24		REV. A
	DWN.	Yuan	Dec-10-15
	CHK.	YK Liao	Dec-10-15
SHEET 2 OF 2	APP.	Joe Huff	Dec-10-15