

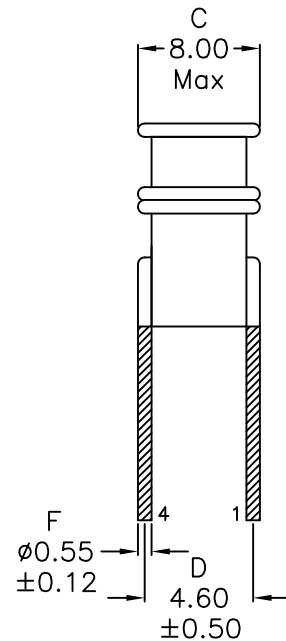


1. Mechanical Dimensions:

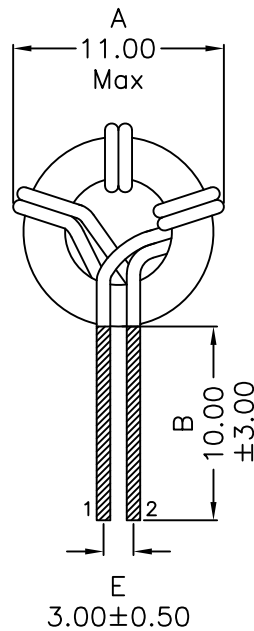

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 6.0uH Min @10KHz, 0.1V each wdg

Q: tbd Min @10KHz, 0.1V each wdg

DCR: 8.0 mOhms Max each wdg

Rated Voltage: 50VDC

Rated Current: 5.0A

SRF: tbd MHz Min

Hipot: 500Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -25°C to +75°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

PRELIMINARY

DOC. REV: A/-

XFMRs Inc www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		
SHEET 1 OF 1	P/N: XF0066-VOCMCPL	REV. A	
	DWN.	Yuan	Mar-27-15
	CHK.	YK Liao	Mar-27-15
	APP.	BSJ	Mar-27-15