



1. Mechanical Dimensions:

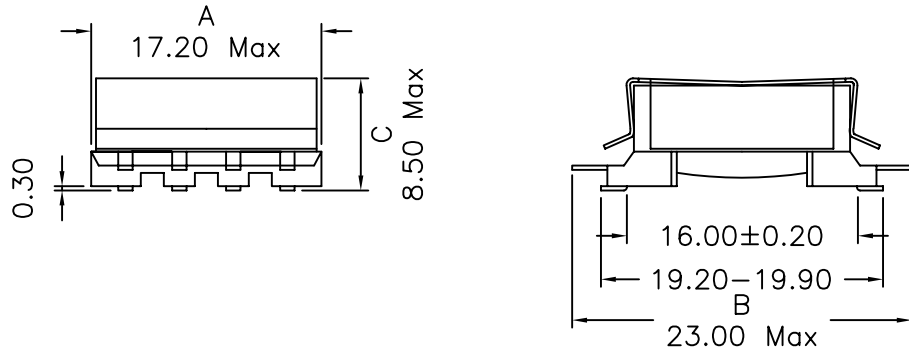

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

2. Schematic:

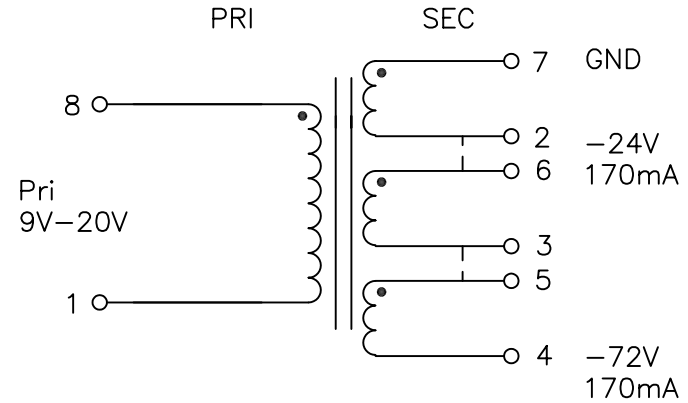

3. Electrical Specifications:

- OCL P8-1: 6uH±10% @100KHz, 0.1V
 OCL P8-1: 4.8uH Min @100KHz, 0.1V, 6.5Adc
 LL P8-1: 0.3uH Max @100KHz, 0.1V Short Secondaries
 DC Res: P8-1 21 mOhms Max
 P7-2 690 mOhms Max
 P6-3 690 mOhms Max
 P5-4 690 mOhms Max
 HIPOT: 500VAC 1 SEC Pri to Sec
 WINDINGS TO CORE

DOC. REV A/1

XFMRS Inc www.XFMRS.com	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0066A-EFD15S	REV. A
TOLERANCES: .xx ±0.25	DWN.	刘 鹏	Jun-29-09
Dimensions in MM	CHK.	李小锋	Jun-29-09
Scale 1.5:1 SHT 1 OF 1	APP.	BW	Jun-29-09