

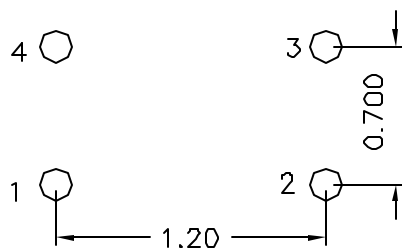


1. Mechanical Dimensions:

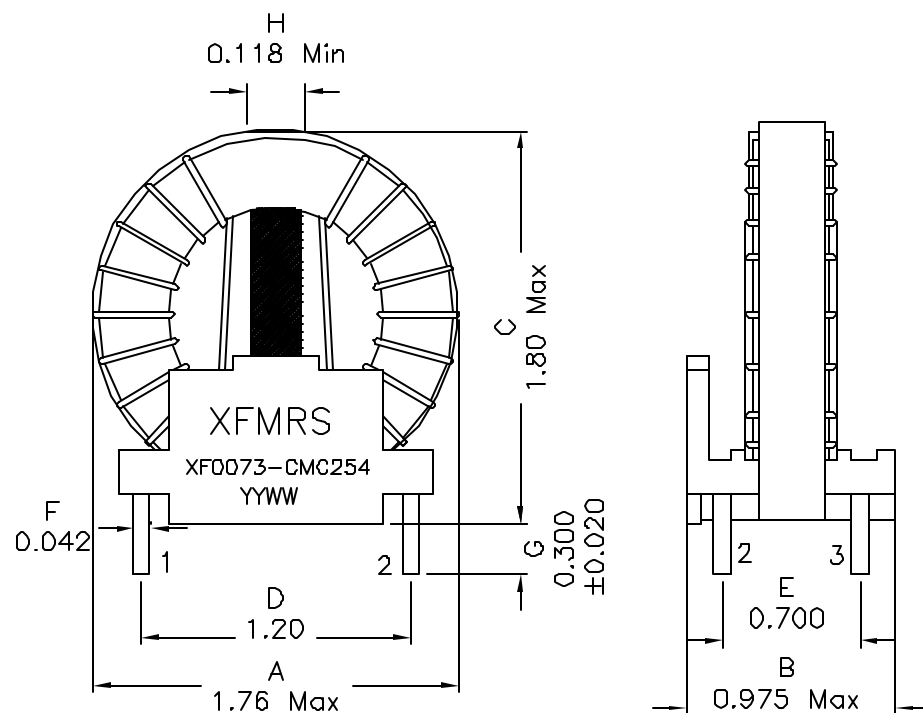

SUGGESTED FOOTPRINT

2. Schematic:

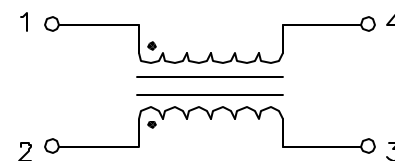

3. Electrical Specifications:

OCL: 7mH Min @10KHz 0.1V, Each Wdg
 3.5mH Min @10KHz 0.1V, Each Wdg -40°C
 Q: 25 Min @10KHz 0.1V
 LL: 104uH Min @10KHz 0.1V, Short Opp. Wdg.
 DCR: 0.045 Ohms Max
 Rated Current: 9A
 Hipot: 2500Vdc, Wdg to Wdg for 1 Min.

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com	Title: Common Mode Choke		
UNLESS OTHERWISE SPECIFIED	P/N:XF0073-CMC254	REV. A	
TOLERANCES: .xxx ±0.010	DWN.	Xianyì	Apr-21-09
Dimensions in Inches	CHK.	YK Liao	Apr-21-09
SHEET 1 OF 1	APP.	Joe Huff	Apr-21-09