

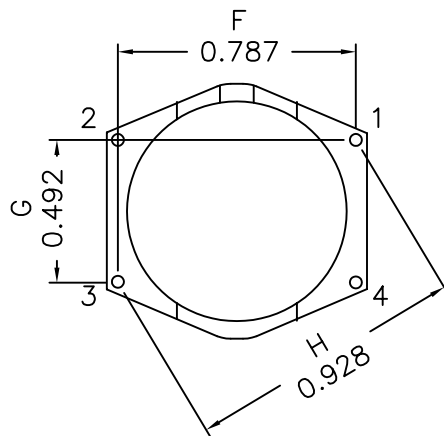
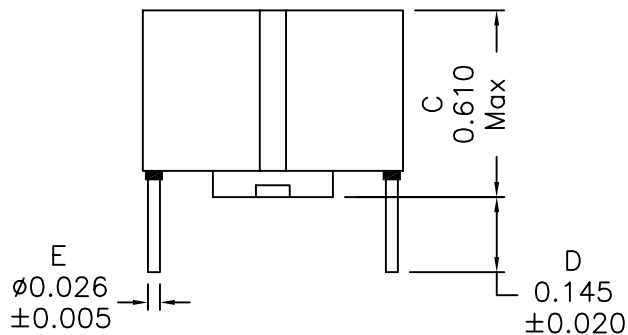


1. Mechanical Dimensions:

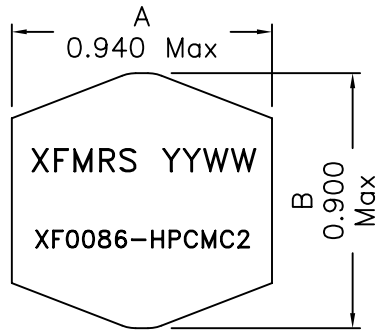

(BOTTOM VIEW)

2. Schematic:

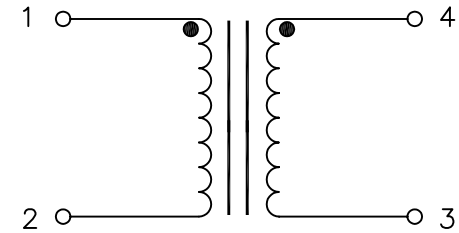

3. Electrical Specifications:@25°C

OCL: 8.0uH±25% @1.0KHz 0.1V Each Wdg 0/4Adc
 Q: 10 Min @10KHz 0.1V Each Wdg
 SRF: 22MHz Typ
 DCR: 0.030 Ohms Max Each Wdg.
 Voltage Rating: 250Vac Max @DC to 1KHz
 Hipot: 2000Vac, Wdgs to Wdgs for 1 Second

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +125°C
6. Storage Temperature Range: -40°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRS Inc. www.XFMRS.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in INCH		P/N: XFO086-HPCMC2	REV. A
		DWN.	Xianyi
		CHK.	YK Liao
		APP.	BW
SHEET 1 OF 1			Mar-26-09

DOC. REV A/2

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.