



1. Mechanical Dimensions:

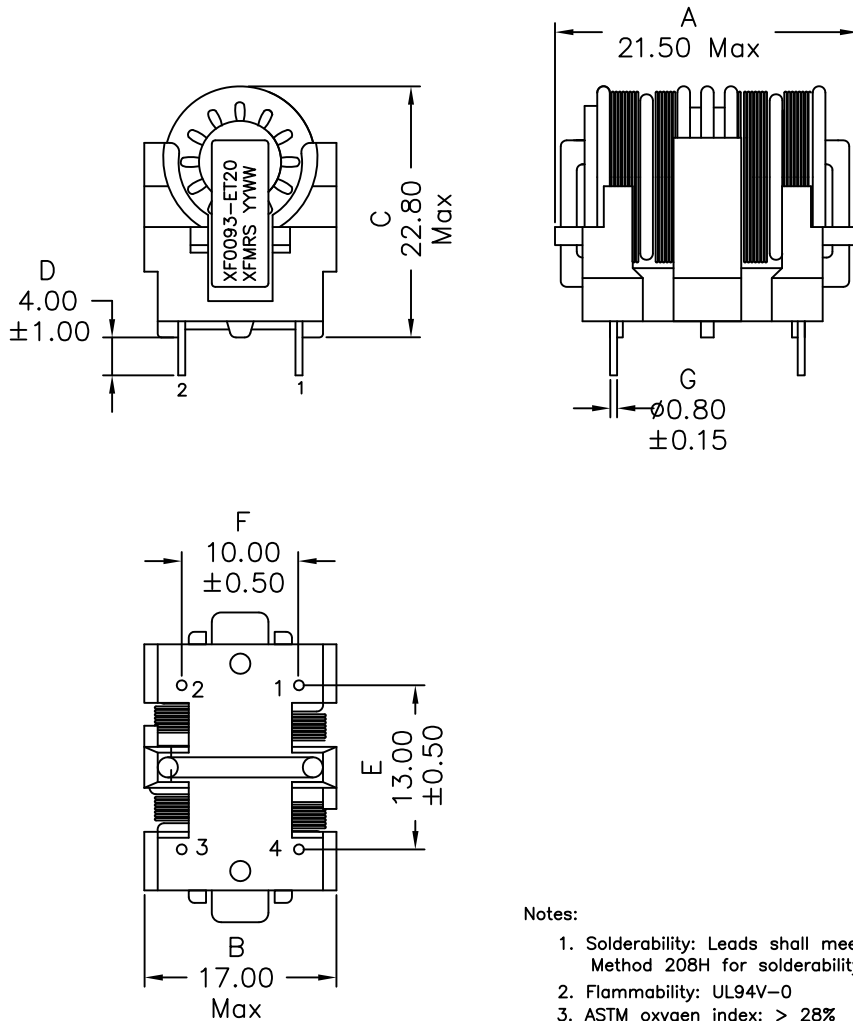

2. Schematic:

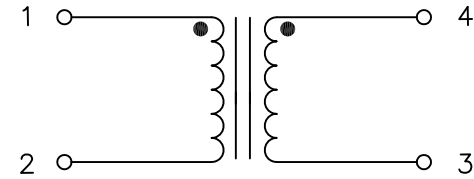

3. Electrical Specifications: @25C


- OCL: 9.0mH Min @40KHz 1.0V, Each Wdg
- 2.0mH Min @40KHz 1.0V, Each Wdg (-40°C to +25°C)
- Q: 5 Min, @1KHz 0.1V, Each Wdg
- DCR: 0.38 Ohms Max, Each Wdg
- Rated Current: 1.3Arms
- Rated Voltage: 250Vrms Max
- Turns Ratio.: (1-2):(4-3)=1:1±2%
- Hipot: 2400Vac 1+2 to 4+3
- SRF: Pins 1-2 150KHz Min

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

XFMRs Inc www.XFMRS.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF0093-ET20	REV. A
SHEET 1 OF 2	DWN.	Xiang	May-24-16
	CHK.	YK Liao	May-24-16
	APP.	GL	May-24-16

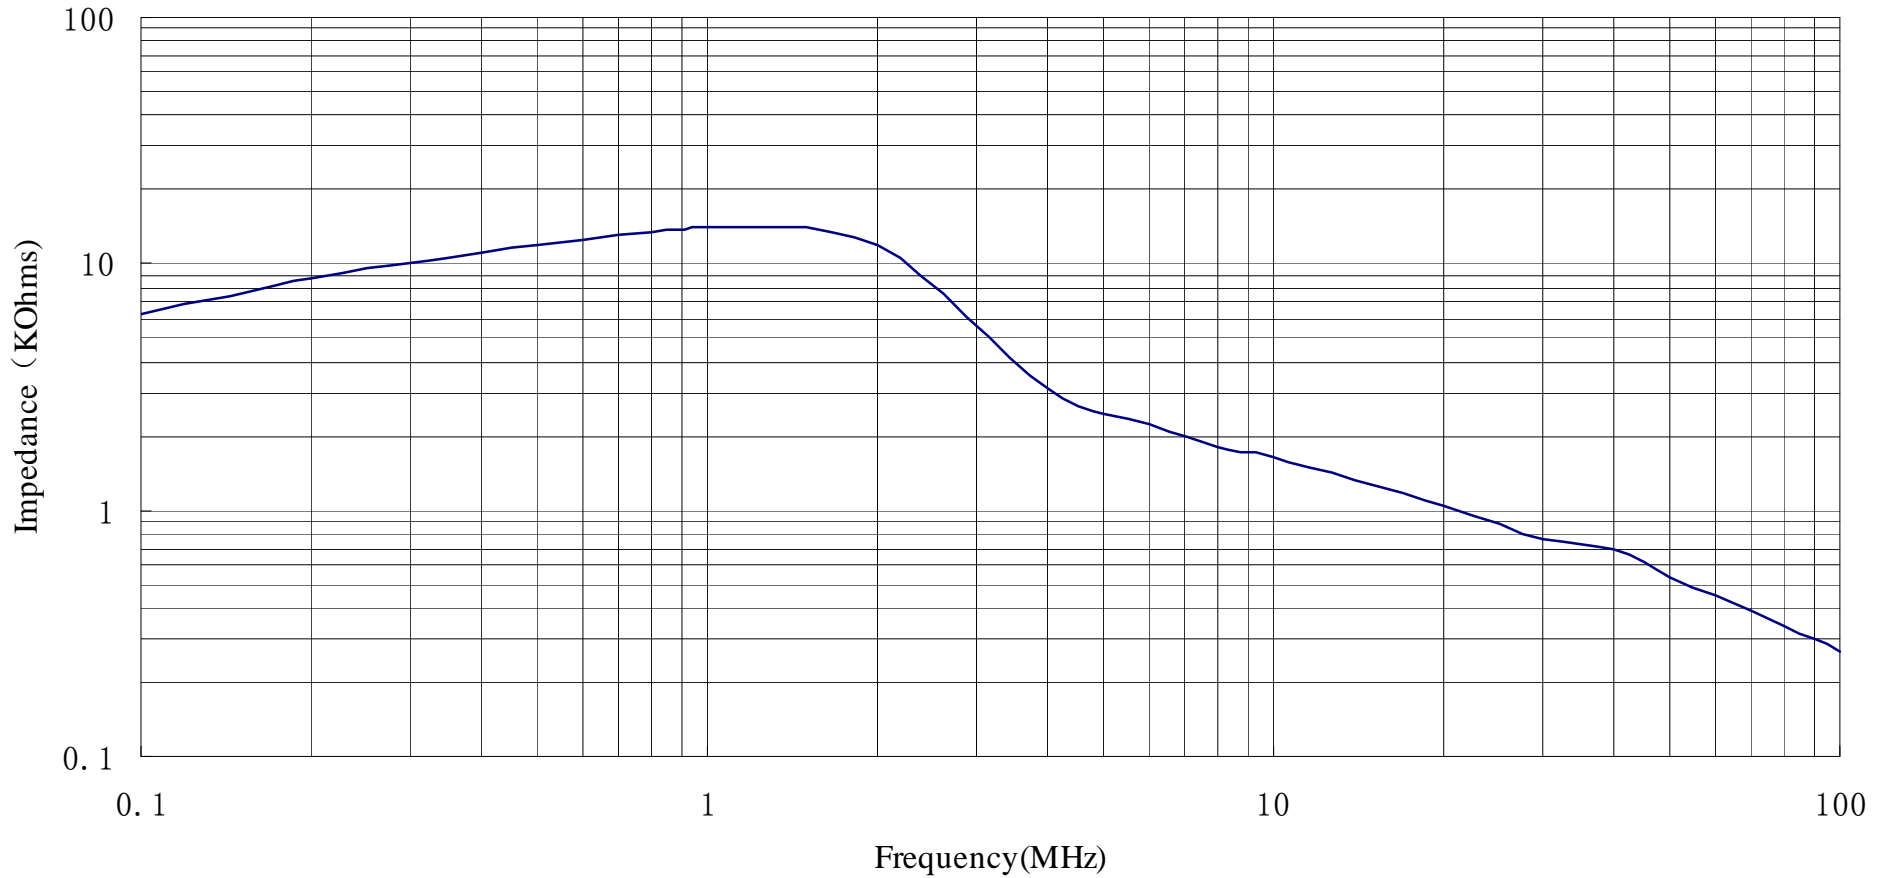

DOC REV: A/1

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
	P/N: XF0093-ET20		REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	DWN.	Xiang	May-24-16
	CHK.	YK Liao	May-24-16
SHEET 2 OF 2	APP.	GL	May-24-16

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.