

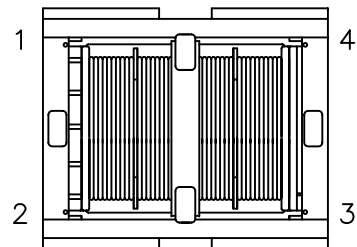


1. Mechanical Dimensions:

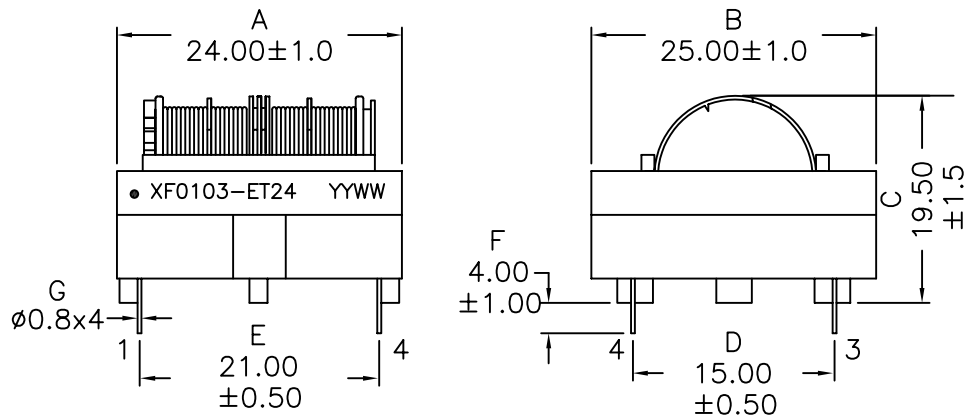


(BOTTOM VIEW)

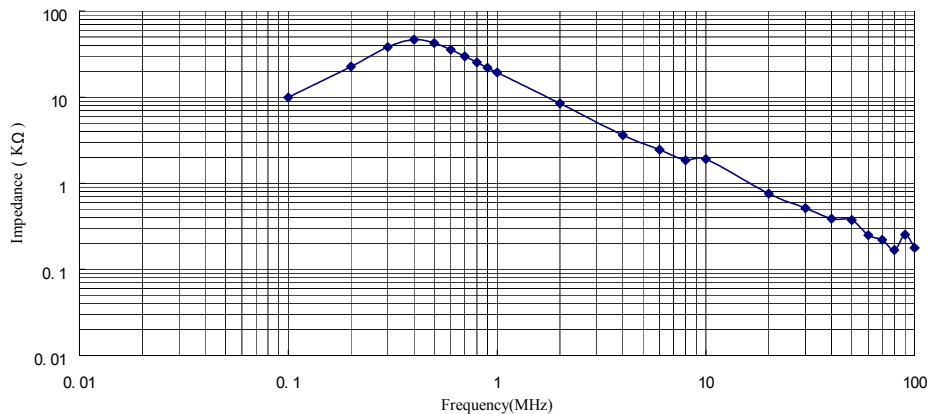

DOC REV: A/3

2. Schematic:

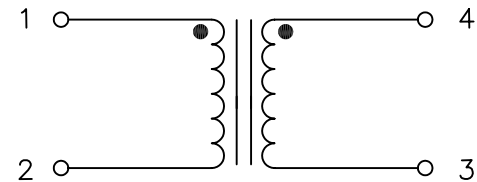

3. Electrical Specifications:

- OCL: 10mH Min @10KHz 0.1V, Each Wdg
- Q: Pins1-2 20 Min @10KHz 0.1V
- DCR: 0.384 Ohms ± 20%, Each Wdg
- Rated Current: 1.0Aac
- Hipot: 3000Vac, Wdg to Wdg, Wdgs to Core

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0103-ET24	REV. A
TOLERANCES:	DWN.	Mei Chen	May-03-10
.xx ±0.30	CHK.	YK Liao	May-03-10
Dimensions in mm	APP.	BW	May-03-10
SHEET 1 OF 1			