



### 1. Mechanical Dimensions:

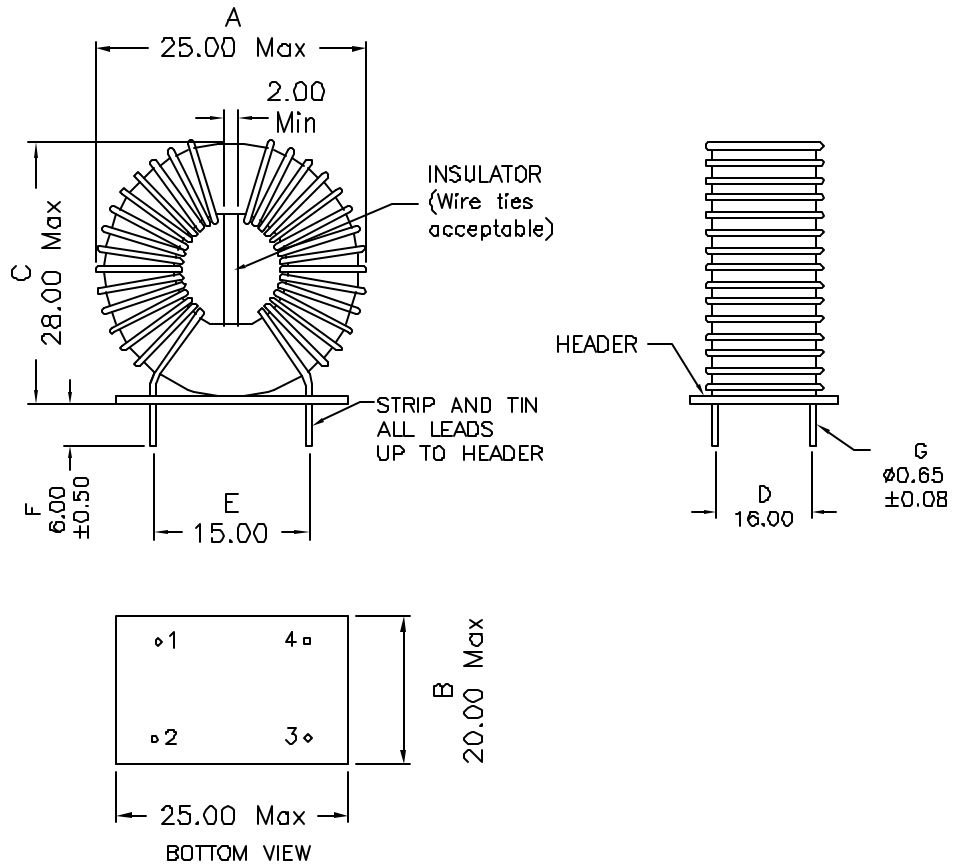

### 2. Schematic:

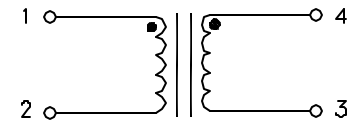

### 3. Electrical Specifications:

- Inductance: 10mH Typ @10KHz 0.1V, Each Wdg
- Inductance: 3.0mH Min @10KHz 0.1V, Each Wdg, -40°C
- LL: Pins 1-2 25uH Min @10KHz 0.1V (Short 4-3)
- DC Resistance: 80mOhms Max, Each Wdg
- Current Rating: 2.0Arms
- HIPOT: 1500Vac, Wdg to Wdg
- Q: 18 Min @10KHz 0.1V

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: B/3

**PROPRIETARY** Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

<b>XFMRs Inc</b> www.XFMRs.com	Title: <b>COMMON MODE CHOKE</b>		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0103-VMCMC		REV. B
	DWN.	Juan Mao	Jun-06-08
SHEET 1 OF 1	CHK.	YK Liao	Jun-06-08
	APP.	Joe Huff	Jun-06-08