

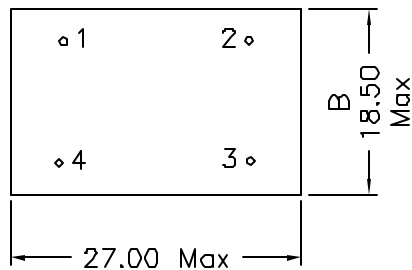



1. Mechanical Dimensions:

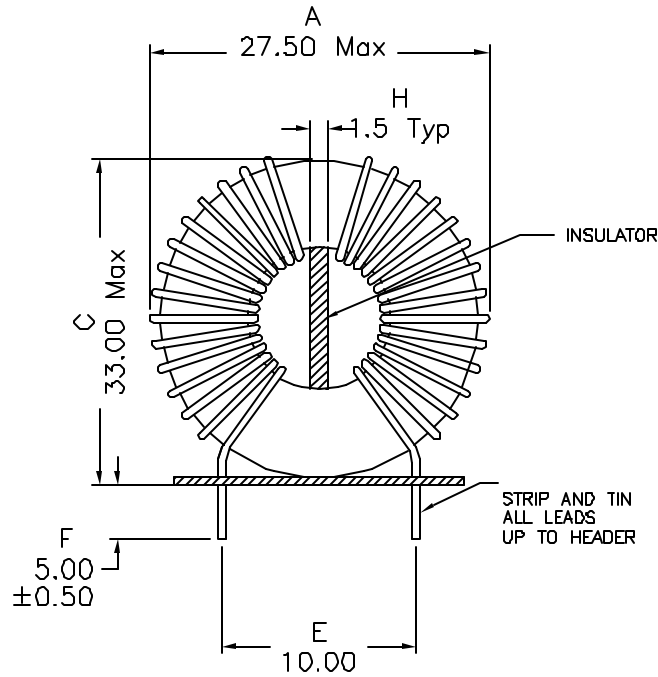

BOTTOM VIEW

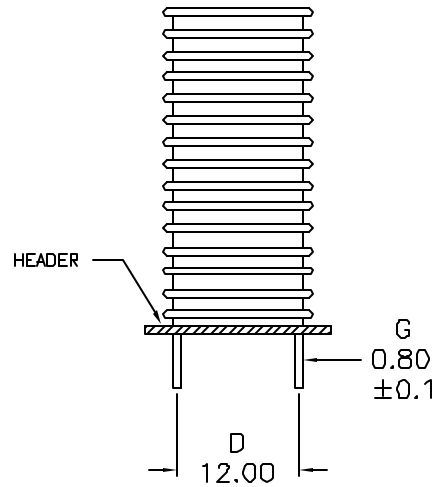

2. Schematic:



3. Electrical Specifications:

- OCL: 10.0mH±30% @10KHz 0.1V, Each Wdg
- OCL: 4.0mH Min @10KHz 0.1V, Each Wdg @-40C
- Q: Pins 4-1 80 Min @10KHz, 0.1V
- Rated Voltage: 250VAC
- DCR: 105mOhms Max, Each Wdg
- Current Rating: 3Aac
- Hipot: 2000Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151558
5. All listed parameters are to be within tolerance from -40°C to +125°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0103-VMCMC2	REV. A
SHEET 1 OF 1	DWN.	Xianyì	May-26-09
	APP.	YK Liao	May-26-09
		Joe Huff	May-26-09