
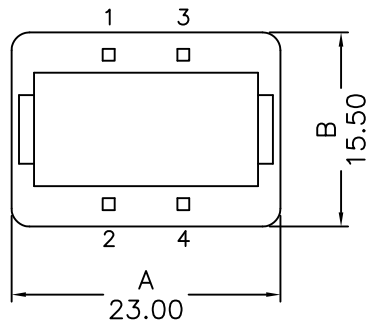


1. Mechanical Dimensions:

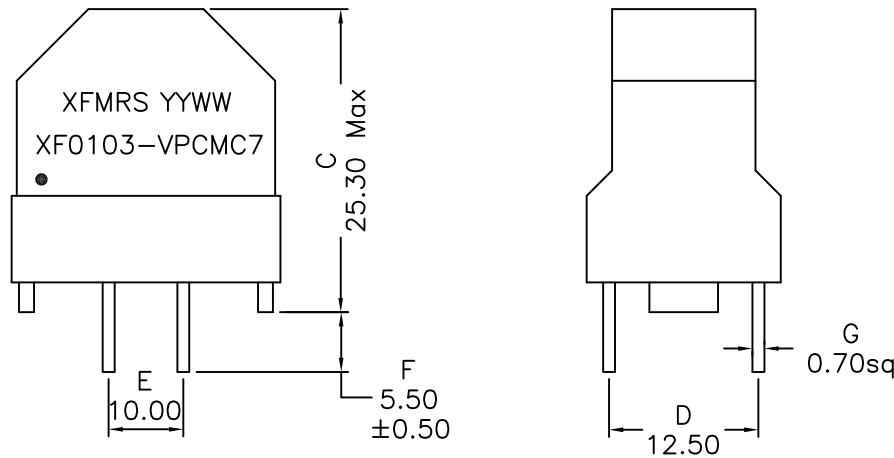


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +125°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

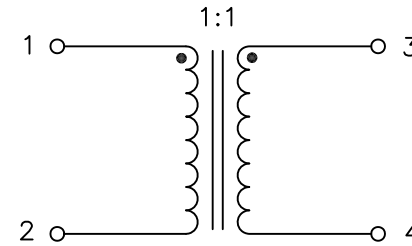


3. Electrical Specifications:

OCL: 10mH+50/-30% @100KHz 0.1V, Each Wdg
 4.5mH Min @100KHz 0.1V, Each Wdg at -40C to 0C
 Q: 8.0 Min @10KHz 0.1V
 DCR: 200mOhms Max, Each Wdg
 SRF: P1-2 160KHz Min,
 Rated RMS Current: 1.2 Amps Max
 Hipot: 1500VAC Wdg. to Wdg. for 60 Secs
 Rated Voltage: 250VAC 50/60Hz

DOC. REV: A/1

XFMRs Inc. www.XFMRs.com	Title: COMMON MODE EMI SUPPRESSION INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0103-VPCMC7	REV. A
TOLERANCES: .xx ±0.25	DWN.	Yuan	Apr-03-15
Dimensions in MM	CHK.	YK Liao	Apr-03-15
SHEET 1 OF 2	APP.	Joe Huff	Apr-03-15

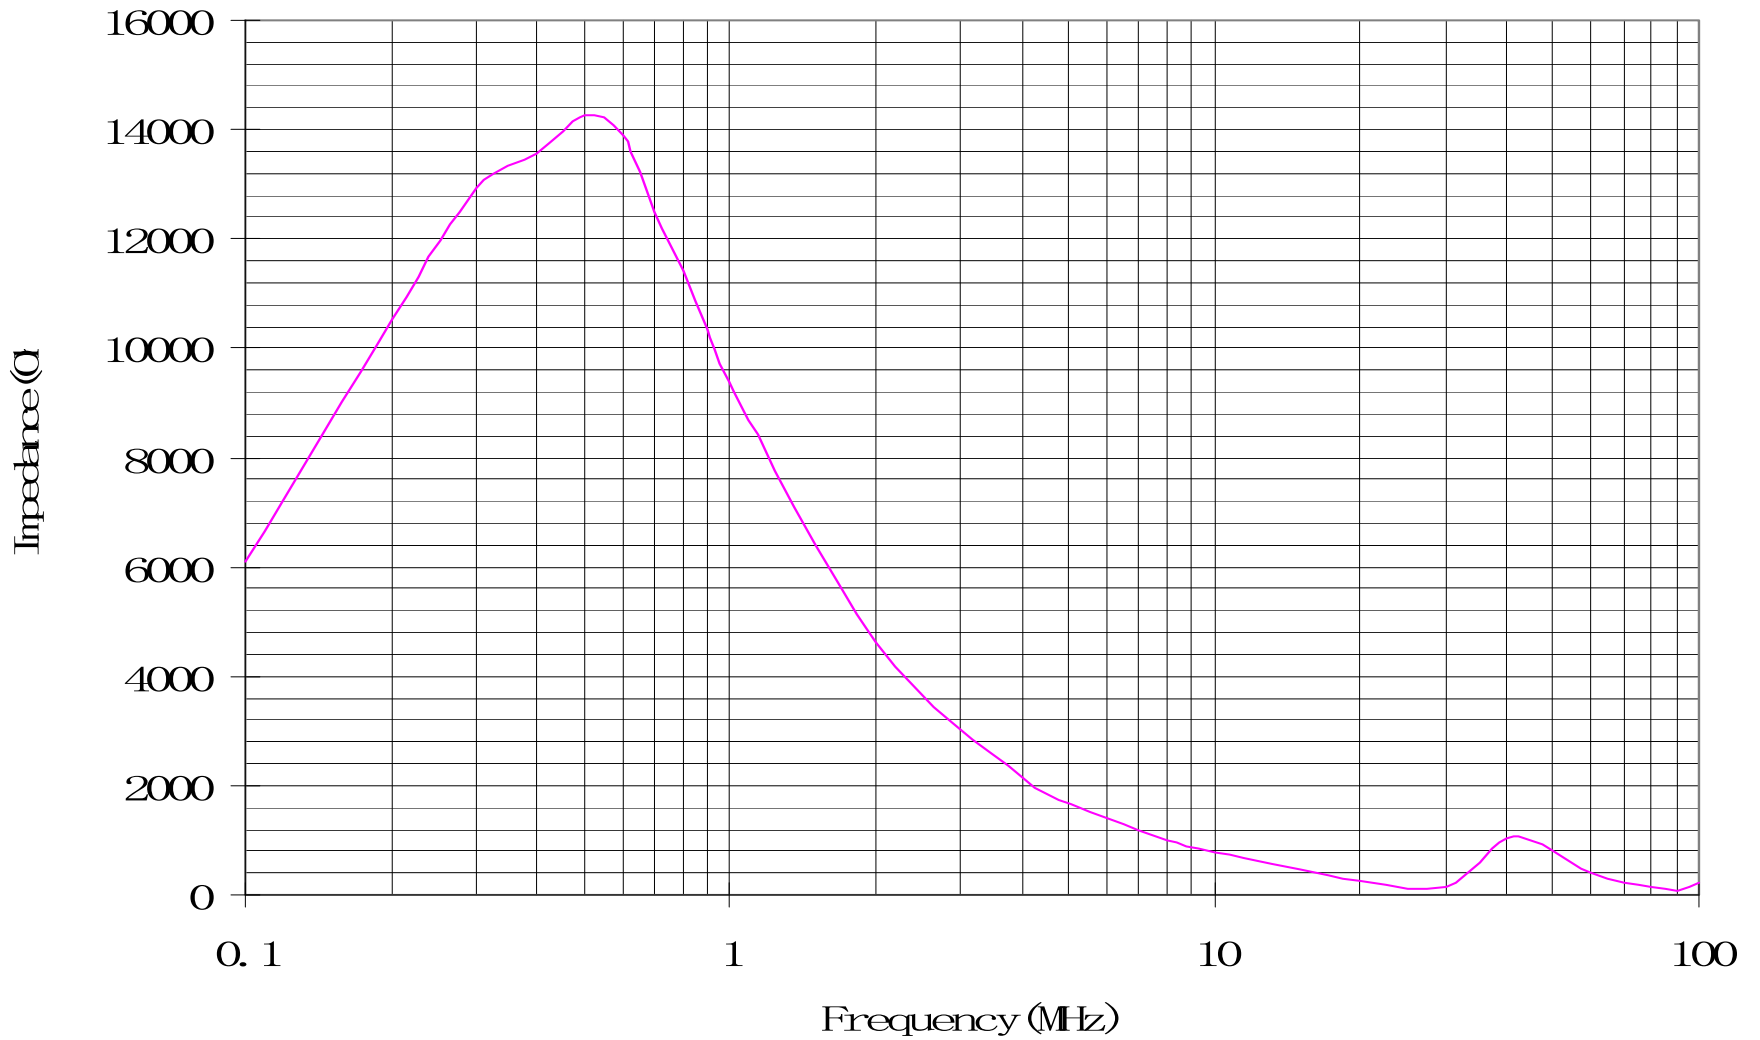

DOC. REV: A/1

XFMRs Inc. www.XFMRS.com	Title: COMMON MODE EMI SUPPRESSION INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0103-VPCMC7	REV. A
SHEET 2 OF 2	DWN.	Yuan	Apr-03-15
	CHK.	YK Liao	Apr-03-15
	APP.	Joe Huff	Apr-03-15