


1. Mechanical Dimensions:

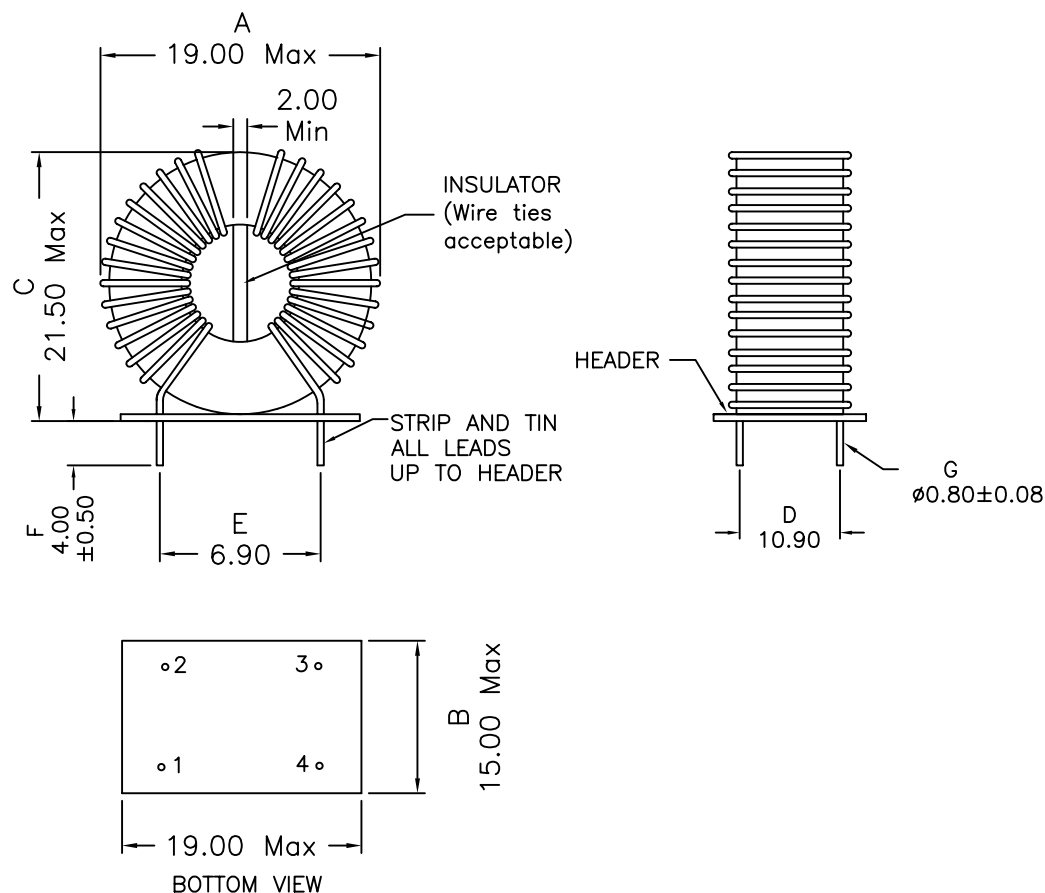


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

2. Schematic:



3. Electrical Specifications:

Inductance: 11mH +50/-3% @10KHz 0.1V, Each Wdg

DC Resistance: 259mOhms Max, Each Wdg

Current Rating: 1.5Arms

HIPOT: 1500Vac, Wdg to Wdg

XFMRs Inc www.XFMRS.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0113-VMCMC	REV. A
SHEET 1 OF 1	DWN.	Juan Mao	Mar-04-10
	APP.	YK Liao	Mar-04-10
	BW	Mar-04-10	