



1. Mechanical Dimensions:

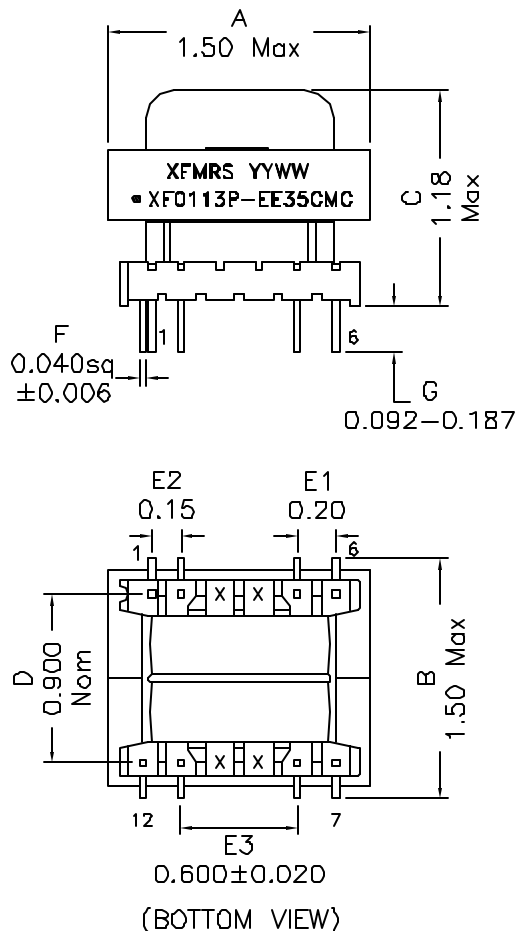

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. Pins #3,4,9,10 are removed.

2. Schematic:

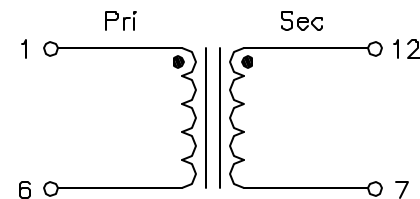

3. Electrical Specifications: @25°C

OCL: 10.9mH Min @10KHz 0.1V, Each wdg

Q: 60 Min @10KHz 0.1V, Each wdg

LL: Pins 1-6 90uH Min @100KHz 0.1V, Short Sec

Cw/w: Pins 1-12 15pF Max @100KHz 0.1V

DCR: Pins 1-6 0.122 Ohms Max

Pins 12-7 0.122 Ohms Max

Current: 3.5Arms

Turns Ratio: (1-6):(12-7) = 1:1±2%

Hipot: 1500Vac Pri to Sec

DOC. REV: A/2

XFMRs Inc www.XFMRs.com	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0113P-EE35CMC	REV. A
SHEET 1 OF 1	DWN.	Feng	May-11-12
	CHK.	YK Liao	May-11-12
	APP.	Joe Huff	May-11-12