

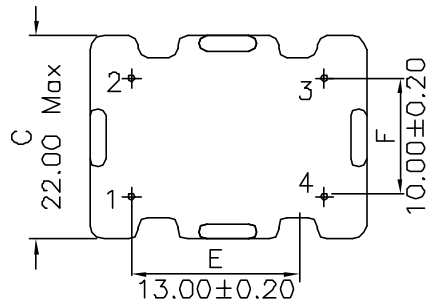
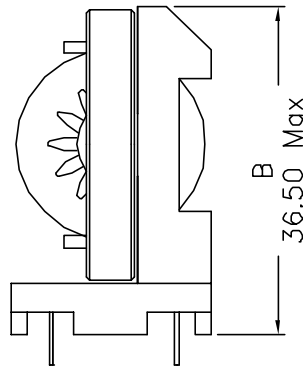


### 1. Mechanical Dimensions:

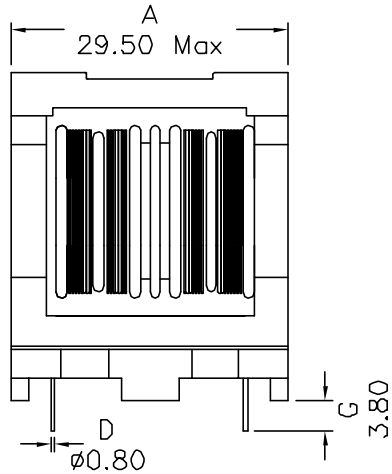


(BOTTOM VIEW)



(TOP VIEW)

### 2. Schematic:

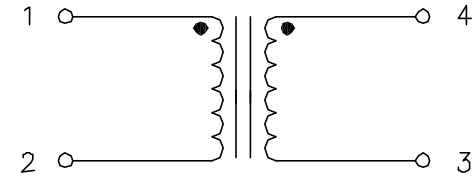

### 3. Electrical Specifications:

- OCL: 12mH Typ @10KHz 0.1V, Each Wdg
- DCR: 0.150 Ohms Typical, Each Wdg
- Rated Current: 8Arms Max
- Hipot: 2000Vac, Wdg to Wdg

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004\*(0.102mm)
9. Moisture Sensitivity: Level 3
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

DOC REV: A/1

**PROPRIETARY**

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

<b>XFMRS Inc</b> www.XFMRS.com		Title: LINE FILTER	
UNLESS OTHERWISE SPECIFIED		P/N: XF0123-2801	REV. A
TOLERANCES: .xx ±0.30		DWN. 罗振江	Jan-31-05
Dimensions in mm		CHK. 廖玉坤	Jan-31-05
SHEET 1 OF 1		APP. BW	Jan-31-05