


1. Mechanical Dimensions:

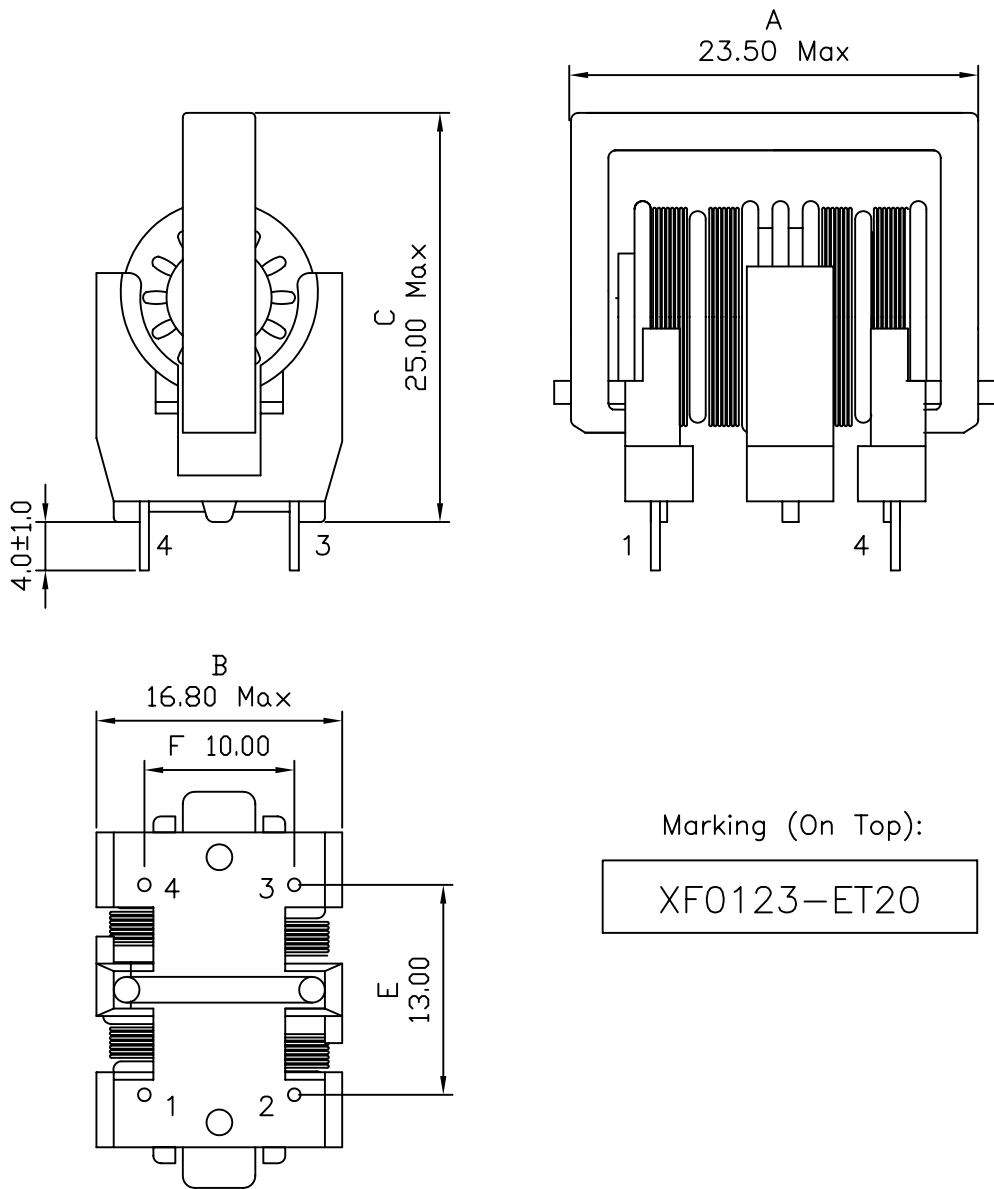


Marking (On Top):

XF0123-ET20

DOC REV: A/1

2. Schematic:

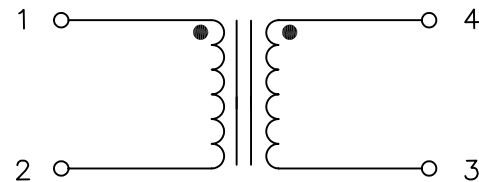

3. Electrical Specifications:

OCL: 12mH Min @10KHz 0.1V, Each Wdg

DCR: 1.10 Ohms Max, Each Wdg

Rated Current: 0.6Arms Max

Rated Voltage: 250Vrms Max

Isolation Voltage: 2000Vac

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -20°C to +115°C
6. Storage Temperature Range: -55°C to +125°C

XFMRs Inc	Title: LINE FILTER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF0123-ET20 REV. A
SHEET 1 OF 1	DWN.	Juan Mao May-07-04
	CHK.	YK Liao May-07-04
	APP.	Isaiah M May-07-04

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.