



1. Dimensions:

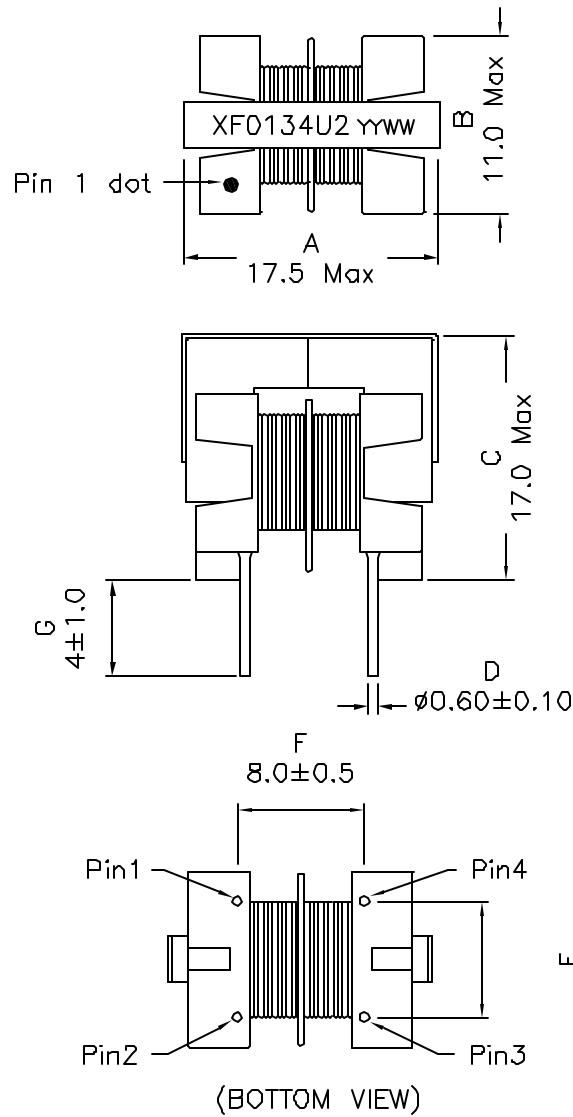

2. Schematic:

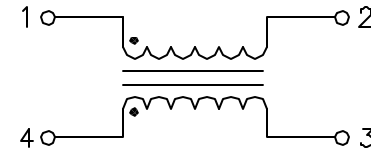

3. Electrical Specifications:

TR: (PIN1-2) : (PIN4-3) = 1:1 \pm 1%
 OCL: 1.3mH Min. @10KHz 0.1V
 PIN1-2, PIN4-3 DC Resistance: 0.50 Ohms Max
 Rated Current: 0.700Arms
 Rated Voltage: 250Vrms
 HIPOT: 2000VAC (PIN1-2 TO PIN4-3)
 HIPOT: 2000VAC (Windings to Core)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151555
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC, REV: A/1

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com		Title: COMMON MODE CHOKE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx \pm 0.30		P/N: XF0134-00U2	REV. A
Dimensions in MM	DWN.	李小锋	Mar-07-08
	CHK.	康玉坤	Mar-07-08
SHEET 1 OF 1	APP.	BW	Mar-07-08