



1. Mechanical Dimensions:

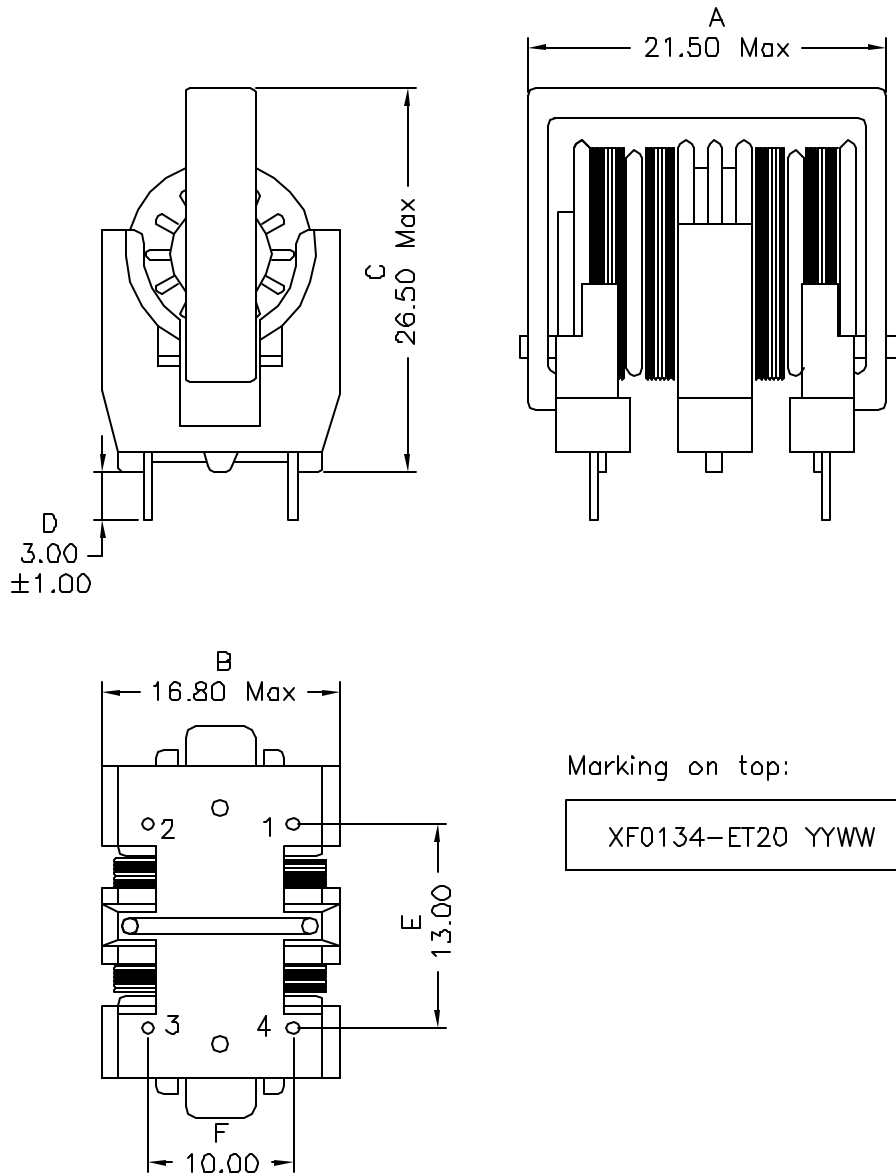

2. Schematic:

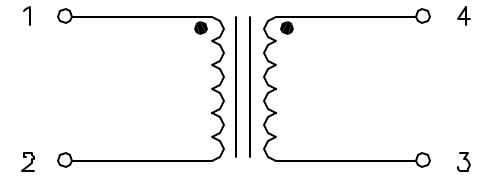

3. Electrical Specifications:

OCL: 1.3mH Min @10KHz 0.1V, Each Wdg

Q: 8 Min @10KHz 0.1V, Each Wdg

DCR: 0.180 Ohms Max, Each Wdg

IDC: 2.2Arms Max

Rated Voltage: 250Vrms Max

Isolation Voltage: 2000Vac

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -20°C to +115°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/5

XFMRs Inc www.XFMRs.com	Title: LINE FILTER			
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF0134-ET20	REV. A	
.xx ±0.30	DWN.	Mei Chen	Apr-13-10	
Dimensions in mm	CHK.	YK Liao	Apr-13-10	
SHEET 1 OF 1	APP.	Joe Huff	Apr-13-10	